

Johnson Controls-Hitachi Air Conditioning India Limited

HEAD OFFICE & WORKS

Hitachi Complex, Karan Nagar, Kadi,
Distt.- Mehsana - 384440, Gujarat, India.

Email: sales@jci-hitachi.com
Website: www.hitachiaircon.com/in

REGISTERED OFFICE

9th Floor, Abhijeet - I, Mithakhali Six Roads,
Ahmedabad - 380 006, Gujarat, India.

T - +91-79-26402024
CIN No. L29300GJ1984PLC007470



Call: 079-7141-4848 (Landline)
Mobile/WhatsApp: 756788-4848
E-mail: customercare@jci-hitachi.com



This is an e-waste product and should not be mixed with general household waste at the end of its life. For more details, kindly visit our website or contact Hitachi Dial-a-Care.

Join us at:  <https://www.facebook.com/HitachiHomes/>  <https://twitter.com/HitachiHomes>  <https://www.youtube.com/c/HitachiCoolingHeatingIndia>  <https://www.linkedin.com/company/johnson-controls-hitachi-air-conditioning>



Live Chat at www.hitachiaircon.com/in



Hitachi India Customer Care



ANDROID APP ON Google play



Available on the App Store



Customer Care 756788-4848

The product specifications may change without prior notice to allow Johnson Controls-Hitachi Air Conditioning India Limited to incorporate the latest innovations for its customers. The information/recommendations contained in this catalogue are merely suggestive. Johnson Controls-Hitachi Air Conditioning India Limited declines any responsibility in the broadest sense, for any loss/damage, direct or indirect, arising from the use and/or interpretation of the recommendations in this catalogue. Reference to cooling capacity in TR or Tr. is in general parlance for Tonnage Class only. For exact cooling capacity in Watts, kindly refer specifications sheet.

For further details on T&C and disclaimer in the entire brochure please refer to our company website.

**Discover Hitachi Cooling & Heating products accompanied
by best service at your nearest dealer/retail outlet.**

February 2024

Cooling & Heating

HITACHI

Room air conditioners
new air

air


A woman with dark hair tied in a bun is holding a newborn baby. She is smiling and looking down at the baby, who is looking up at her. The background is a bright, out-of-focus window with vertical bars.

new
is a beautiful feeling




—
Hitachi brings
new to India

India's
1st
Hi Wall unit

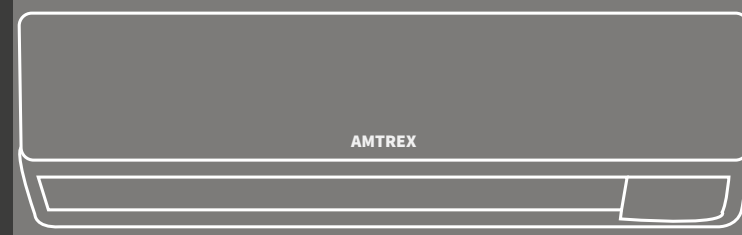


India's
1st
Side Throw
Window AC

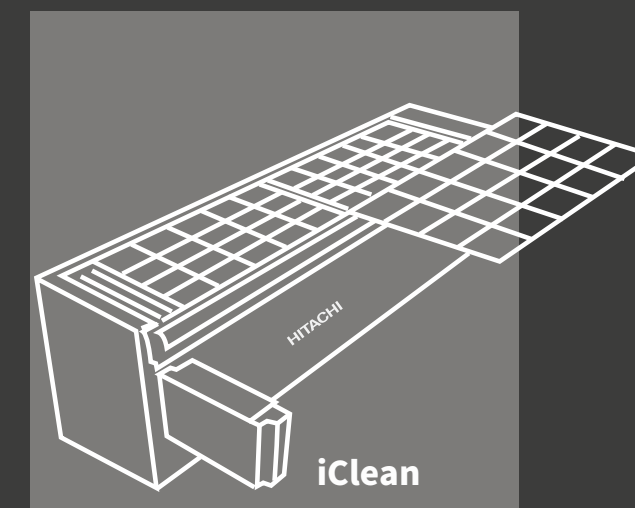



Xpandable



India's
1st
Cassette
Unit

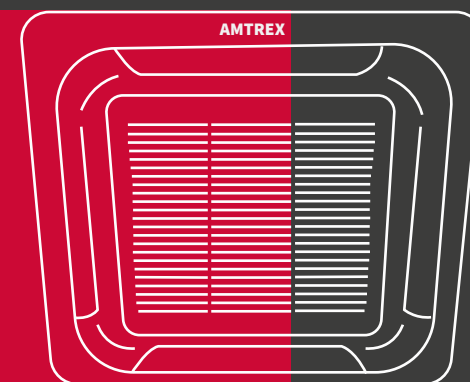

new

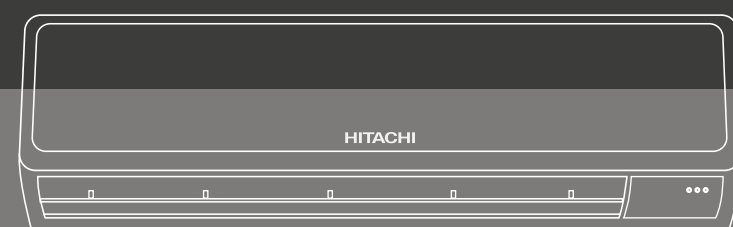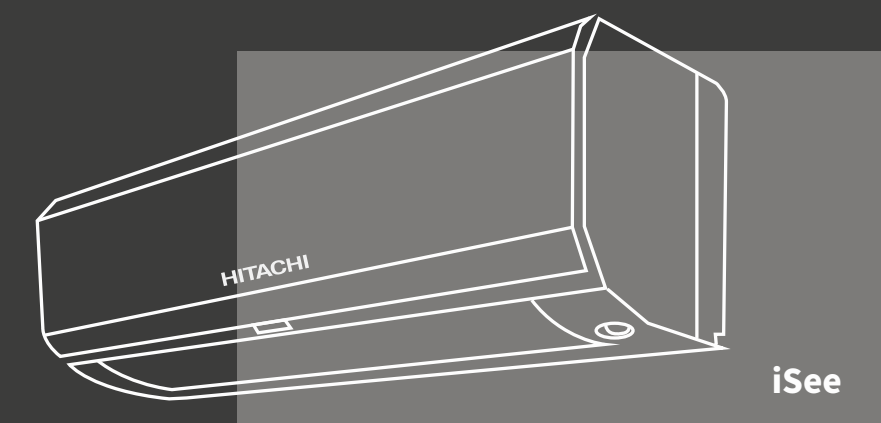


Follow Me Technology




Atom



Soft Dry

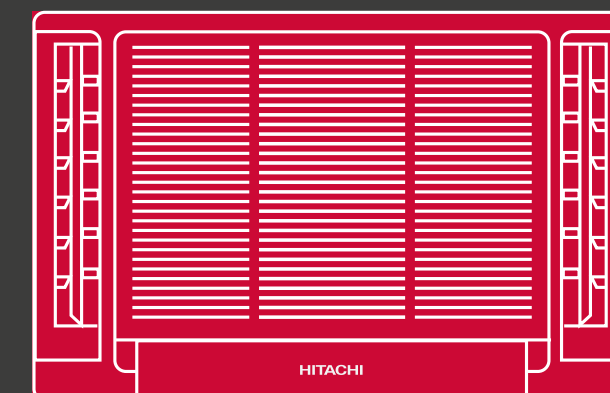

Quadricool AC

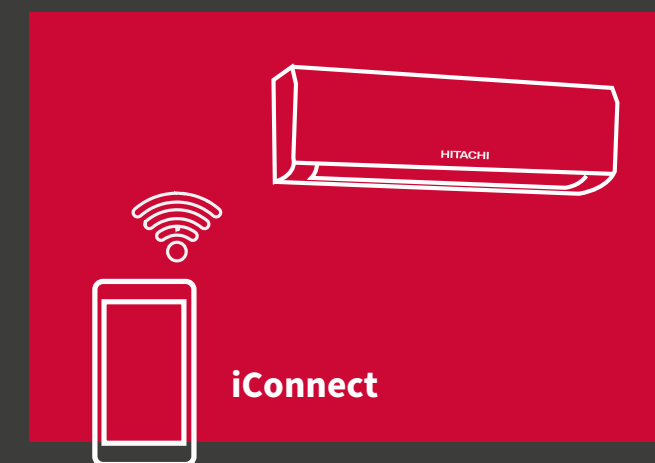

iConnect



Feels the best

air is nothing short of extraordinary.

It's all around us, and it enables life.

It changes from time to time—sometimes cool,


sometimes warm—but is always in sync

with our surroundings.

It infuses life into the place we call home,

and we adore it like no other.

air

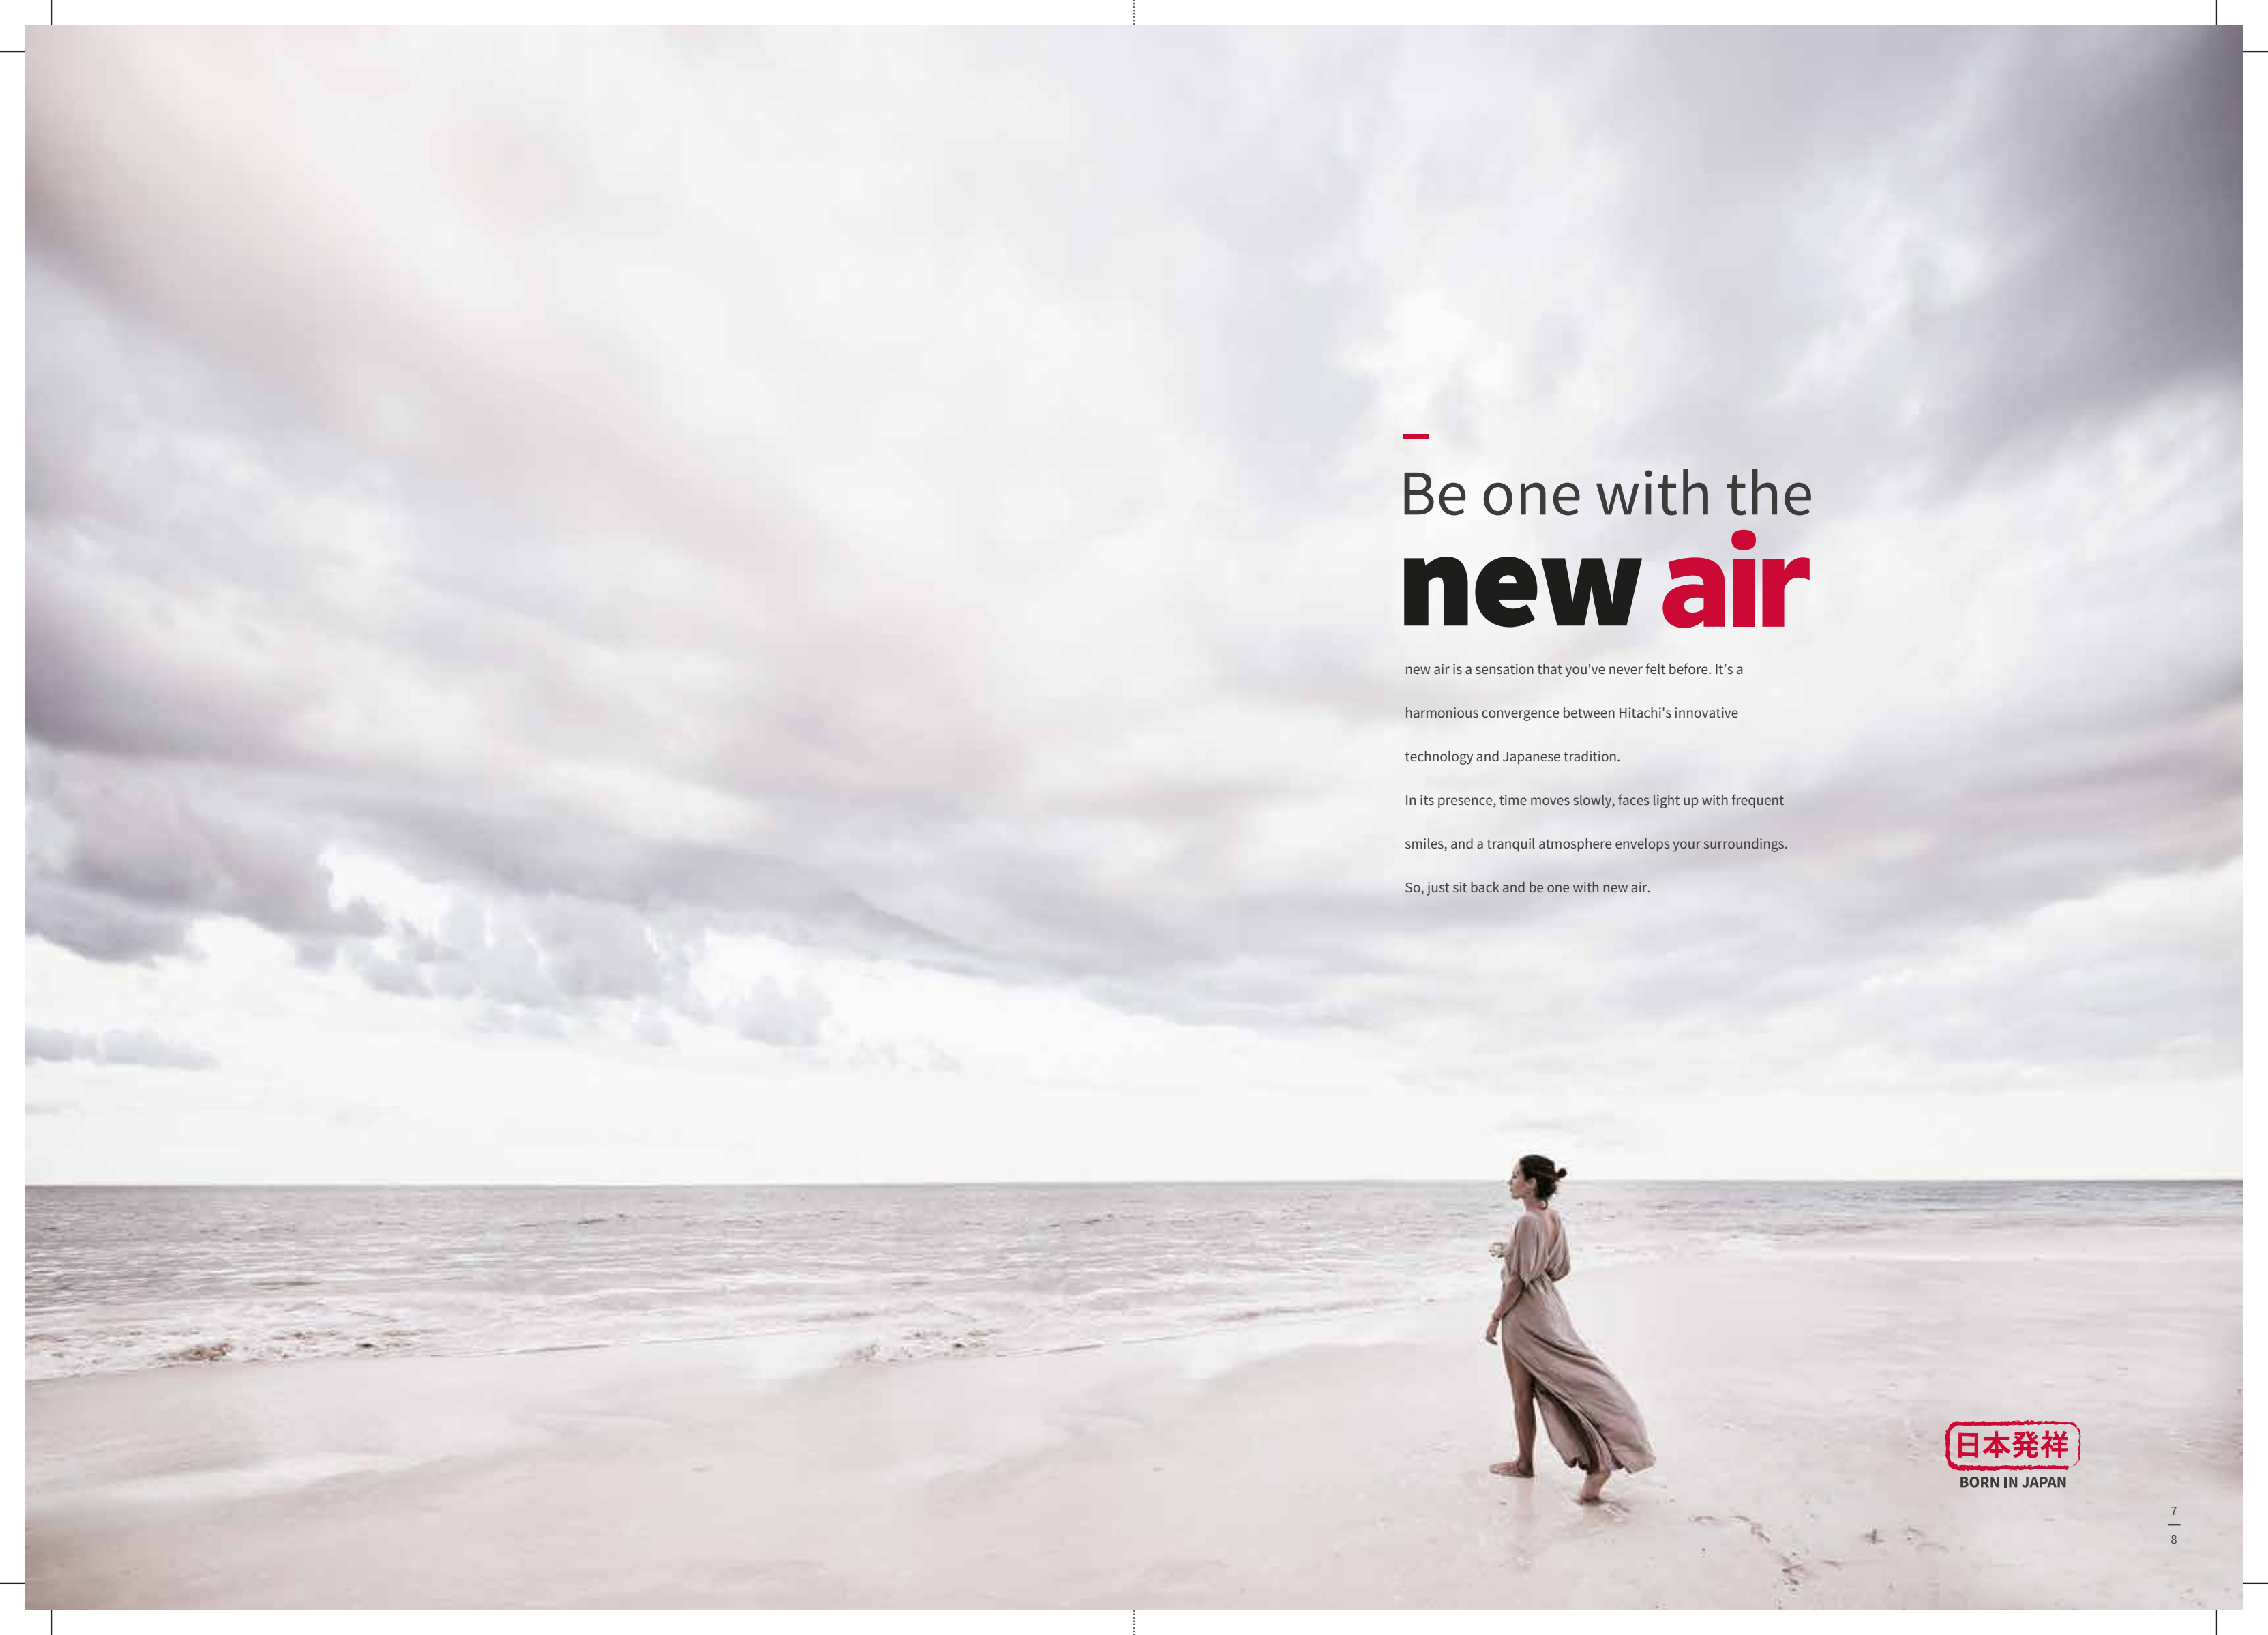

—

Be one with the **new air**

new air is a sensation that you've never felt before. It's a

harmonious convergence between Hitachi's innovative


technology and Japanese tradition.

In its presence, time moves slowly, faces light up with frequent


smiles, and a tranquil atmosphere envelops your surroundings.

So, just sit back and be one with new air.

日本発祥
BORN IN JAPAN

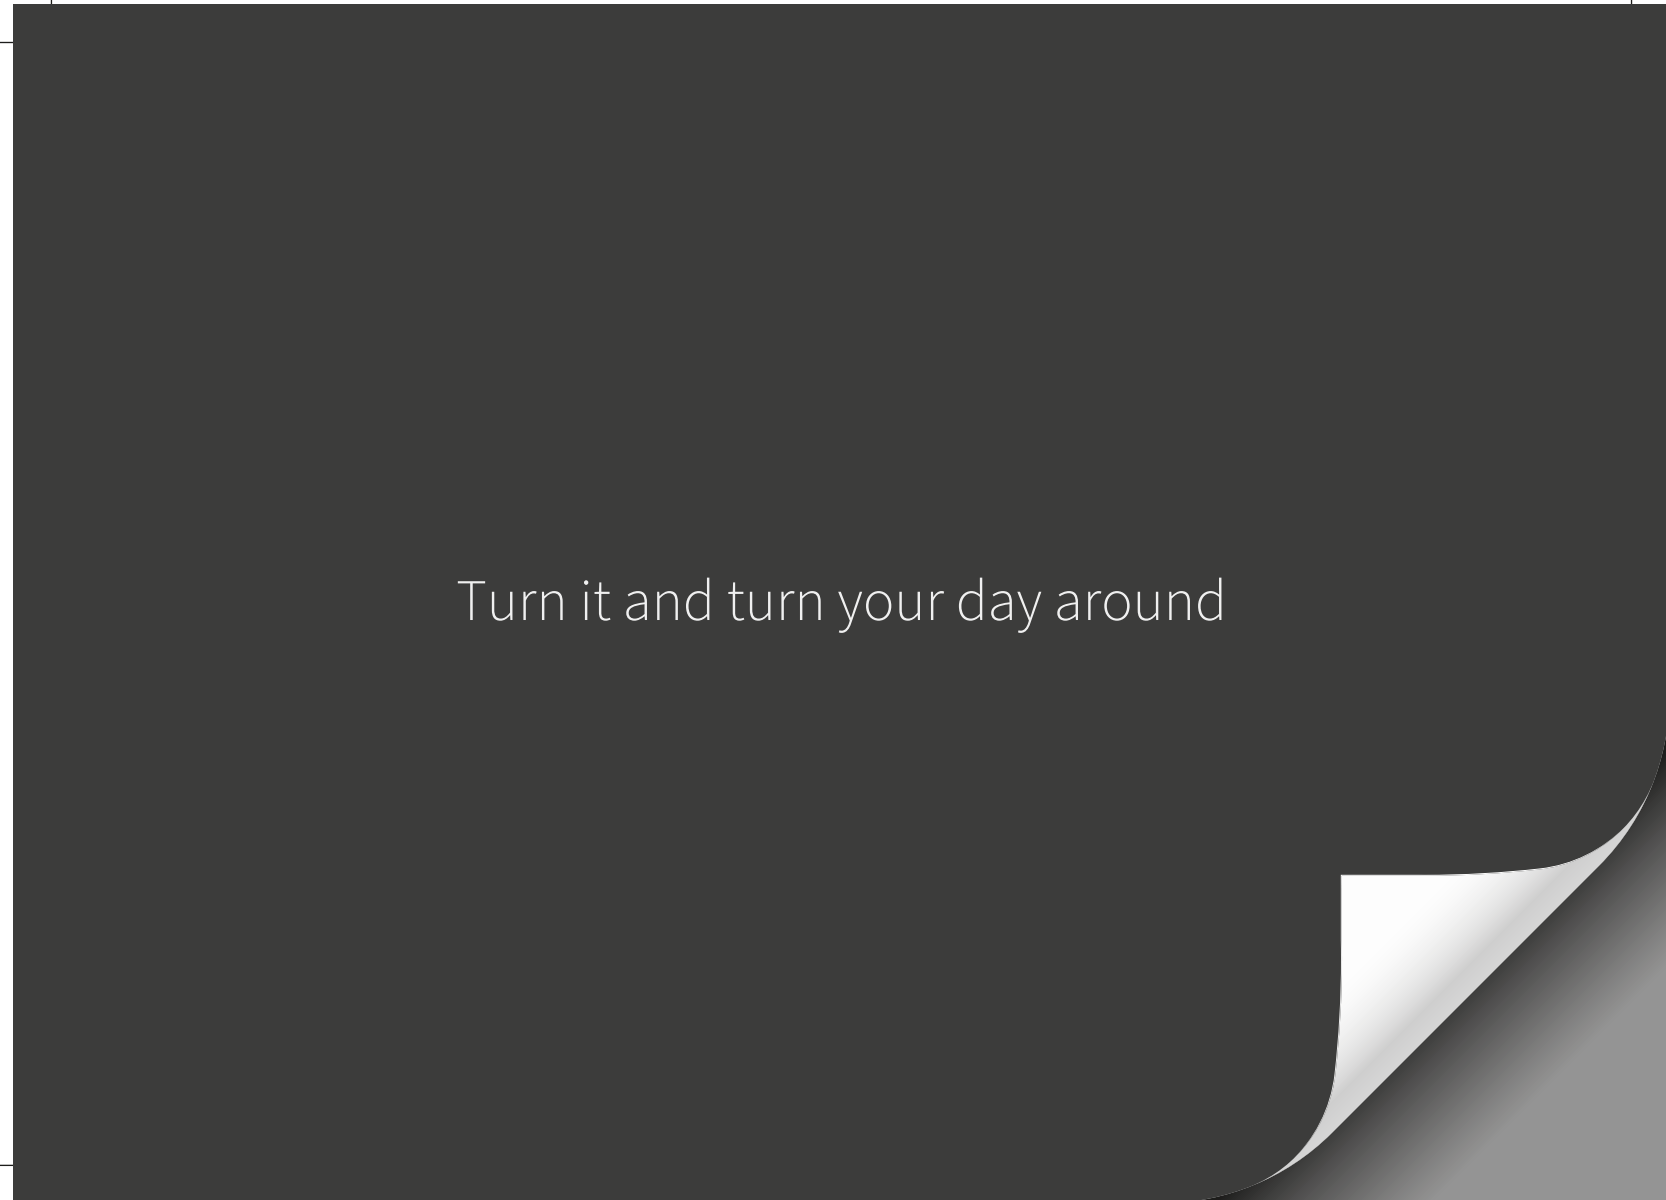

Turn it and turn your day around

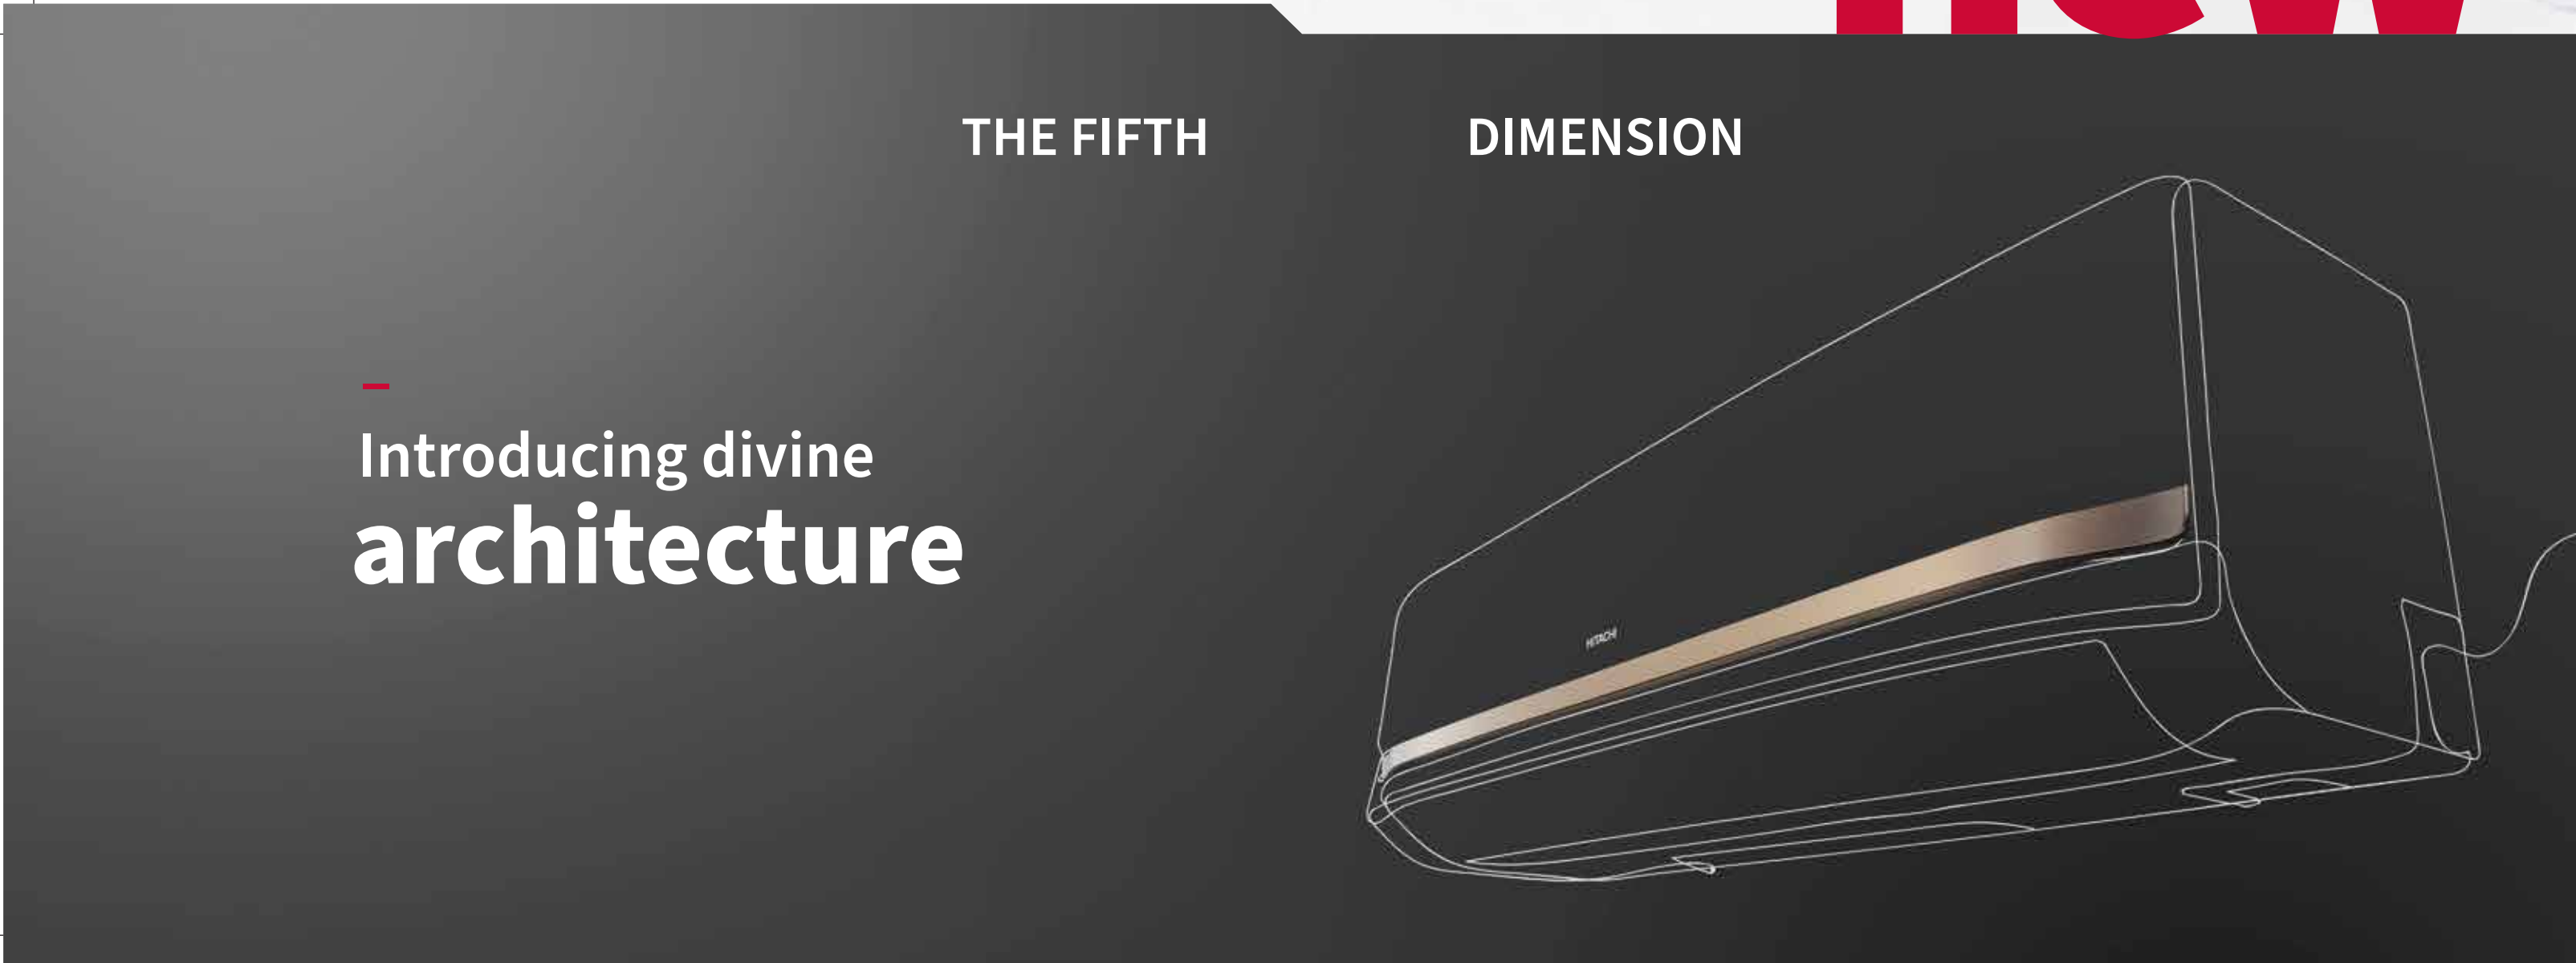

THE FIFTH

DIMENSION

Introducing divine
architecture



What is

new



Hitachi's architecture is always

Global

Inspired by its origin

Japan

Inspired by one of the world's mightiest Japanese sword

刀 Katana


The Japanese katana is renowned as the finest sword in the world, created by a master craftsman who fuses two metal pieces into a single, unbreakable entity. This seamless integration gives the metal its remarkable strength. Our new design builds upon this principle of combining elements to generate true worth.





We do
Cooling

And we do
Heating

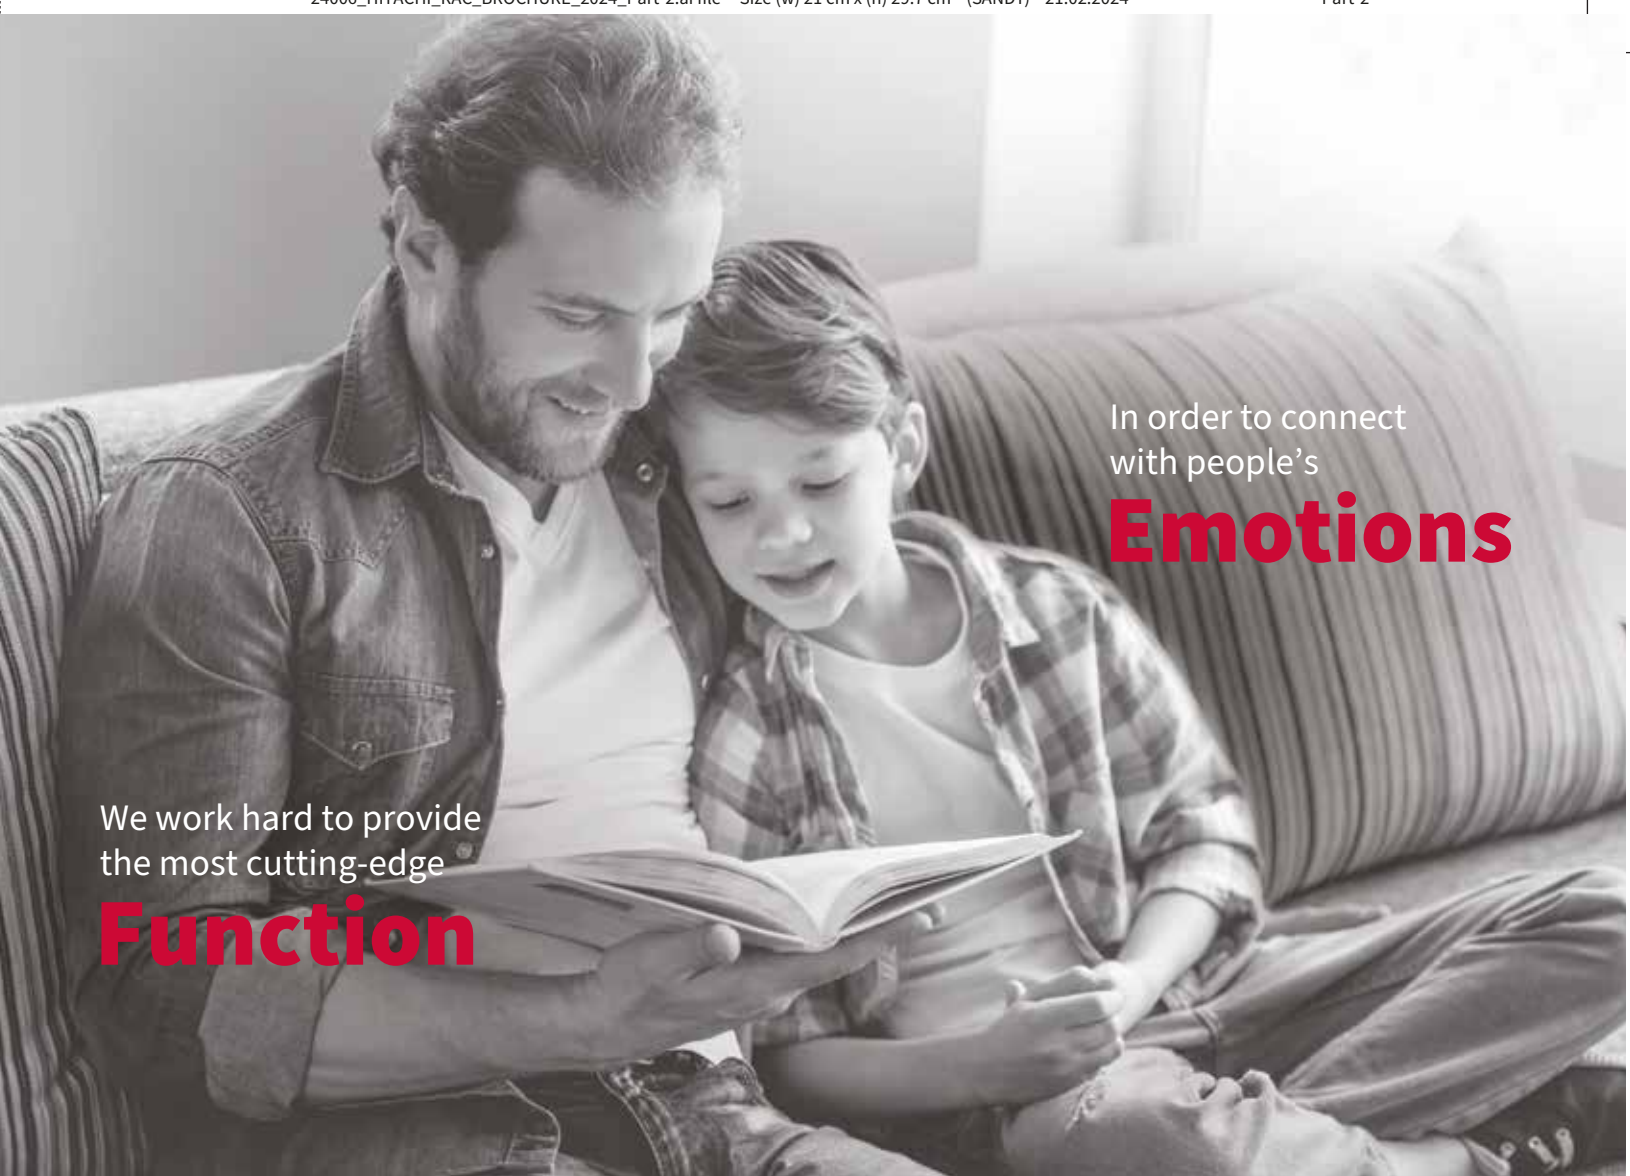

In order to connect
with people's
Emotions

We work hard to provide
the most cutting-edge
Function



We generate environments that are
Artificial

Making people feel
Natural



We create systems that are
Complex

To make people's lives
Simple



Design philosophy

Duality

design

Cooling

Japanese

Integrated

Compact

Heating

Global

Iconic

Efficient



NEW

Dual surface finish

Glossy finish



Textured finish

NEW

Dual panel look

An imaginative dual-panel design adds to the interior's charm



NEW Dual gold color

First of its kind by Hitachi, a dual color that celebrates the curve of the product and enhances its design

NEW

Dual platinum color

First of its kind by Hitachi, a dual color that celebrates the curve of the product and enhances its design



Longer Lasting Color

NEW **Star white color**
with **UV protection**

The true color of craftsmanship never fades



NEW **Accentuated curve design**

The accentuated curve design increases the airflow to

larger spaces giving perfect cooling comfort

NEW

Iconic wave design

Touch the wave of excellence



Image is for illustration purpose only.

To transform
House

into **Home**

NEW **airHome**
series



NEW **airHome**
series





We build everything around you

CleanCoolCost SavingComfort

ice Clean				
Xpandable ⁺				
Long air throw				
AQtiv-Ion				
airCloud Go				
Ambience Light				
Soft Dry				
My Mode				
Powerful Mode				
100% Cooling Capacity @ 43°C* ¹				
5 Fan Speed				
Wave Blade Technology				
Hexa Sensor				
Voltage Range				
Tropical Design 52°C				


^{*1} The 100% Cooling Capacity at 43°C is measured at IDU condition: 32°C DB/23°C WB & ODU condition: 43°C for selected models. This condition remains valid throughout the catalogue whenever this feature is mentioned.

ice Clean


Powered by FrostWash Technology

1 Freeze


Dust gets accumulated on surface of coil, affecting AC's performance. Hitachi's unique FrostWash technology creates frost on the IDU coil with the help of dew collected from air moisture.



Collects moisture in the room and forms dew on the heat exchanger.




Heat exchanger is frozen to -15°C. Frost is made evenly and captures dust for easier peeling. Dust is lifted from the heat exchanger fin as the water expands when it's frozen.



Frost on the heat exchanger fin melts first. This leads to an easier slip of all the dust in its frozen state together with the surrounded frost.

3 Dry

The blower keeps running to dry out the coil of any residue and cleans it. Thus, with FrostWash technology you get fresh air in next AC usage.

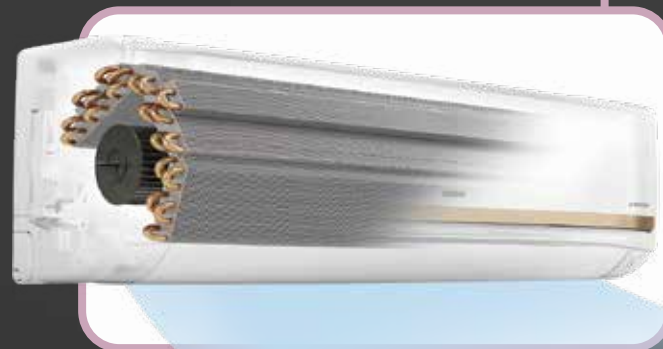

2 Melt


After a certain duration, the frost on the coil melts and then drains with it the trapped dust, mold & bacteria from the IDU coil.




Switch on the ice Clean function by just pressing FrostWash button on the remote. The FrostWash cycle runs for approx. 51 mins depending upon the temperature and humidity conditions inside the room.



AC without ice Clean Technology

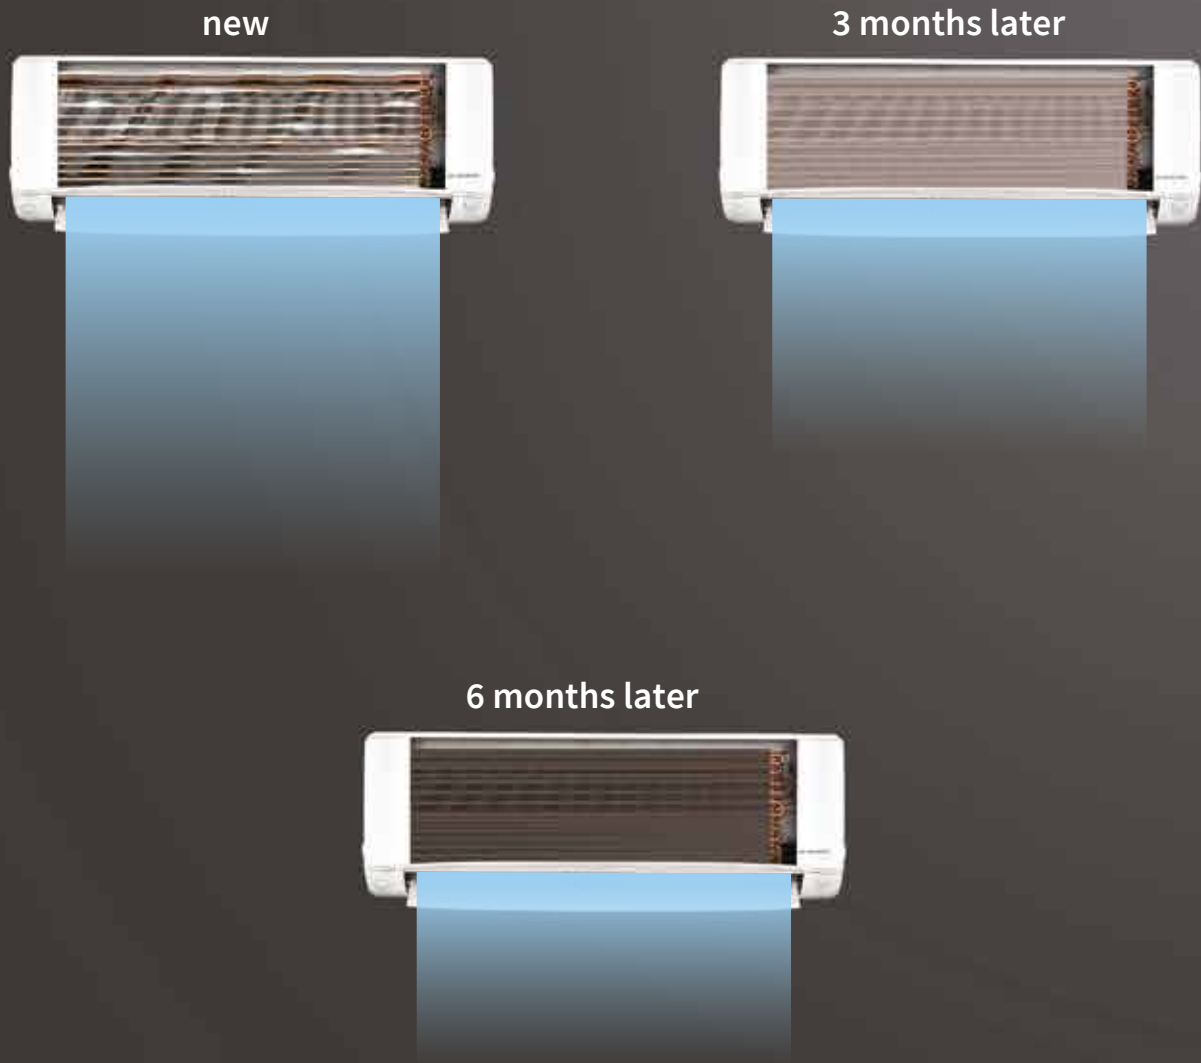

AC with ice Clean Technology

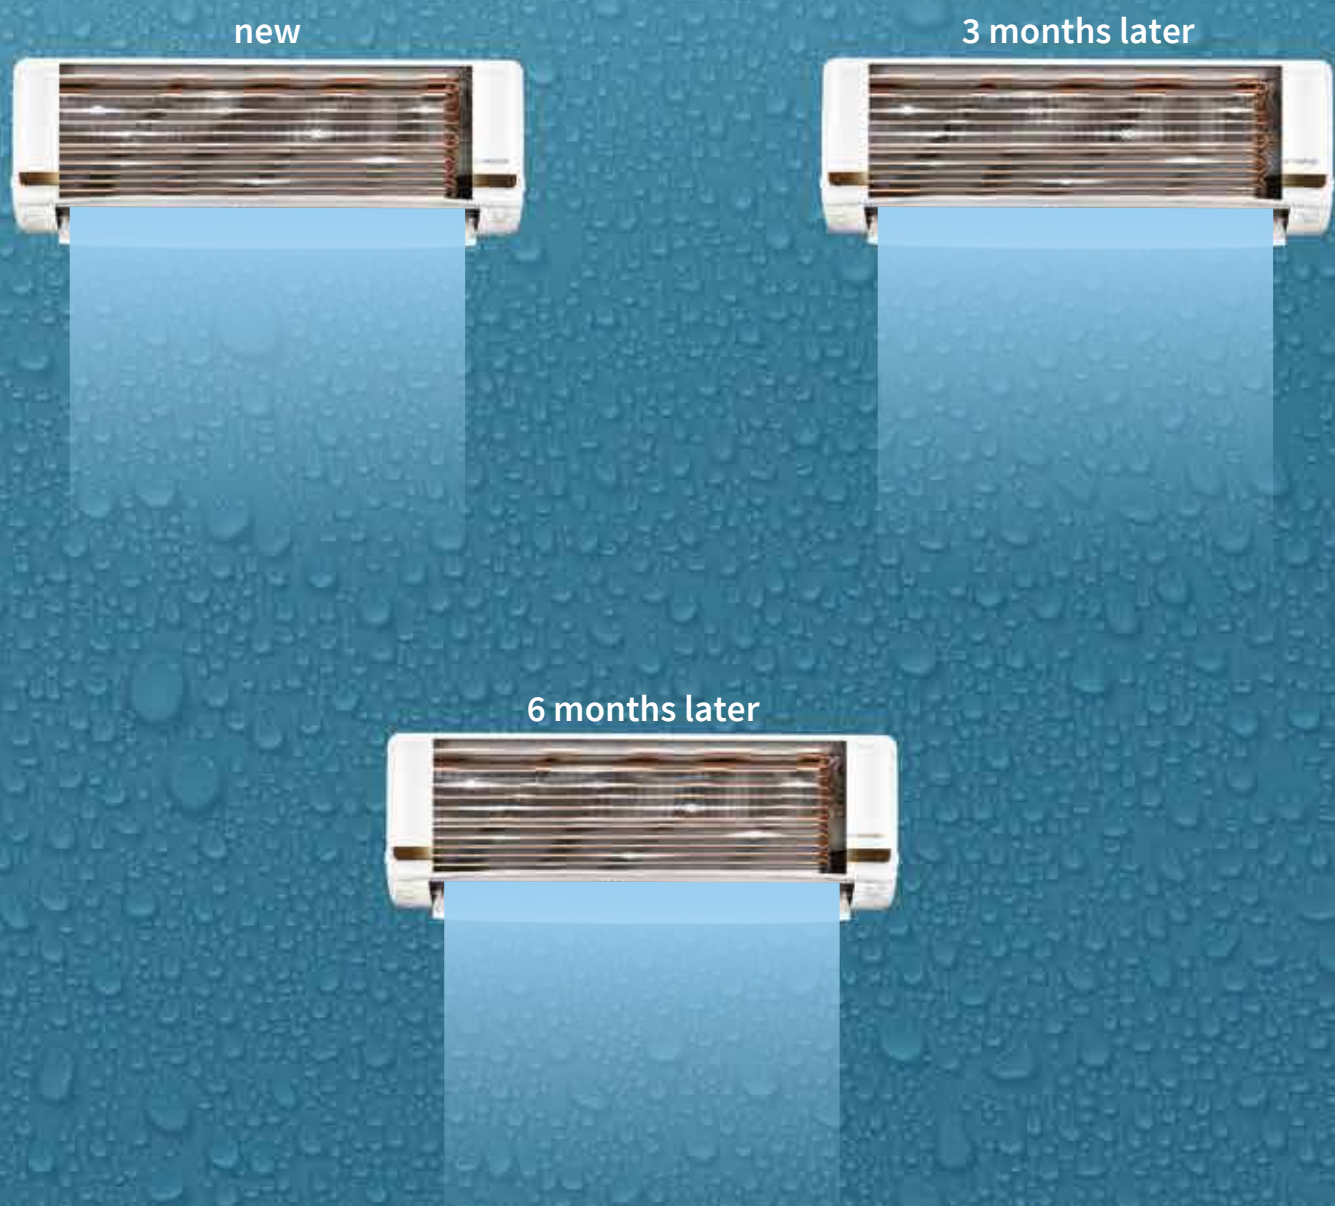


*JCH-IN internal test result simulation.



T&C apply. The images are for illustration purpose only. Please refer operational manual for FW usage details.

Cool

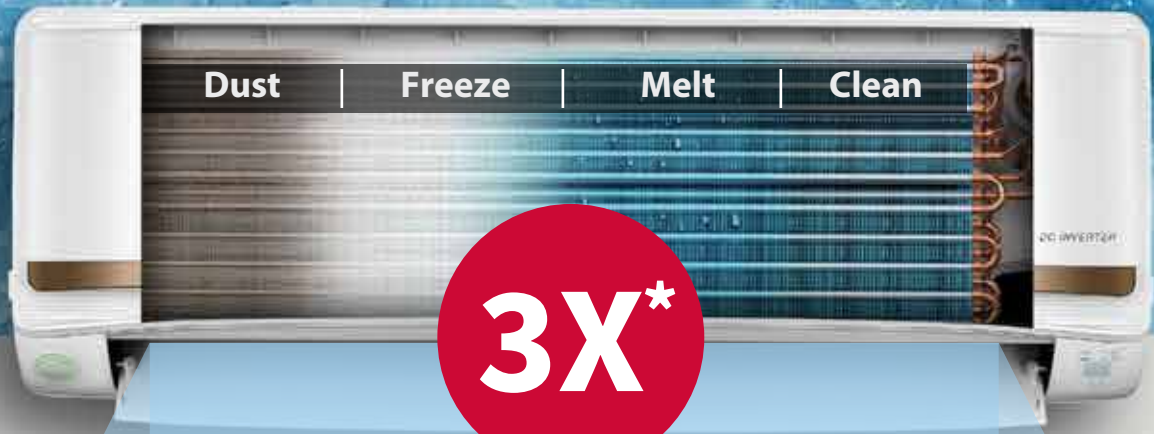

3X*


better at maintaining airflow performance

Clean

Viruses¹

Bacteria²

Mold³



99.0%
removal

99.0%
removal

95.0%
removal

Comfort

Comfort is a special feeling




Wobbler Jacket



Transparent Strip
like a wobbler

1/2/3 Tested by Kitasato Research Center of Environmental Science. Test No. 2020_0650.
Test model: RAS-X22K Reduction effects of virus/bacteria/mold was observed by operating FrostWash™ once.
For 3K better at maintaining airflow data, two identical units were tested for comparison; with and without FrostWash. Test chamber simulated approx. 2 years of dust and oil build up which may be experienced in a typical home environment. Airflow performance was tested before and after being in the chamber. Unit without FrostWash experienced an 18% drop in airflow performance. Unit with FrostWash experienced only 6% performance drop. Tested at Johnson Controls-Hitachi Tochigi factory, Japan Nov/Dec 2021.
The amount is indicative and just for reference understanding with the comparison of FrostWash and Non-FrostWash machine usage.
*T&C apply. JCH-IN internal result.

*Available in selected models only.

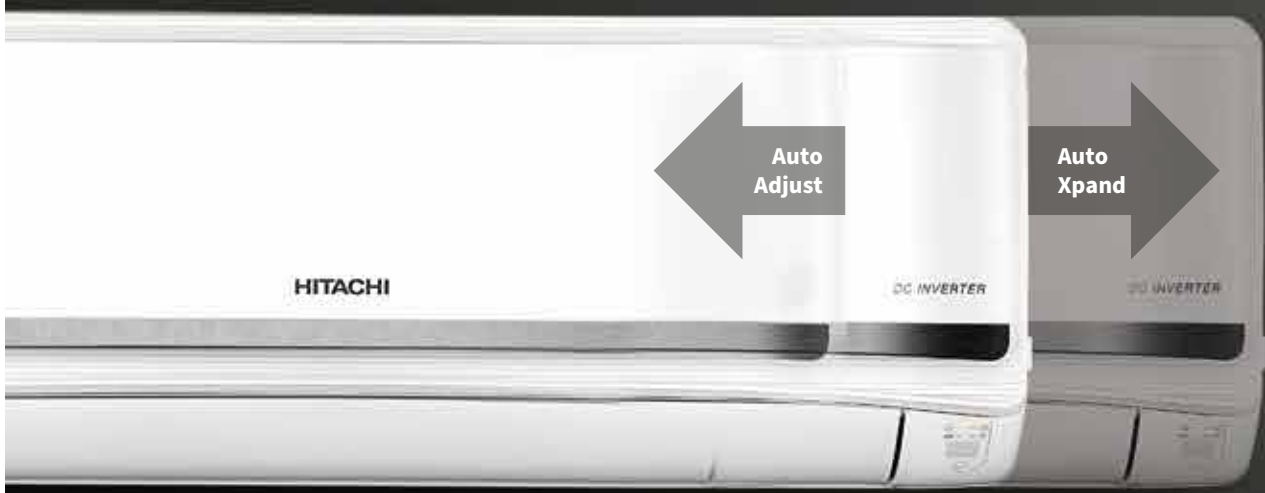

Xpandable⁺

Built-in





X pandable⁺

How does it work?

Xpandable Inverter ACs can increase their compressor's rotation per minute (RPM) from the standard-rated RPM, as and when required, according to the actual ambient conditions outside and load requirements inside the room. Its technology stems from our Tropical Inverter Technology which uses Seamless Cascade Vector DC Inverter System to give better performance than any other non-tropical inverter AC.



Xpanding benefit



 **110%** Cooling capacity**

 **35%** Higher humidity removal**

 **30%** Faster cool down time**

*T&C apply. The Xpandable function also works by just pressing the powerful mode button on the remote. **The data mentioned above is given for 1.5 TR 5 Star model RAS.G518PCBISF at standard test conditions in comparison w.r.to rated condition.



 **27%**
More power savings#

#The data mentioned is a comparison of 1.5 TR 5 Star (RAS.G518PCBISF) vs 1.5 Tr 3 star (RAS.B318PCAIBA) fixed speed model.

24m

Long air throw*



*Air flow distance will vary according to Air conditioner fan speed setting, chassis size/ tonnage, room layout and other environmental factors. Claim refers to 1050 mm chassis at fan speed of 1200 rpm creating an air velocity of 0.15m/s or more measured up to 140 cm from floor in straight position to the IDU unit with an anemometer.
Air flow distance will be 18 mtr. in 950 mm chassis & 12 mtr. in 780 mm chassis in fan mode at 1200rpm.
The image is for illustration purpose only. Air flow distribution will vary according to air conditioner placement, furniture layout, obstructions and other factors.

Long air throw

Distributes air across your room



Faster Cooling



Less Energy Consumption

Image is for illustration purpose only.

Ambience Light

Know Your Ambience



Inspired from Seasons

Cool

Comfort

Warm



While you endure
Choose
Cool Ambience
16~23°C




For me-time
Choose
Comfort Ambience
24~27°C



To feel restful
Choose
Warm Ambience
28~32°C

The mentioned range is for Set temperature. The ambience light has 3 options for your convenience - Bright, dim & off

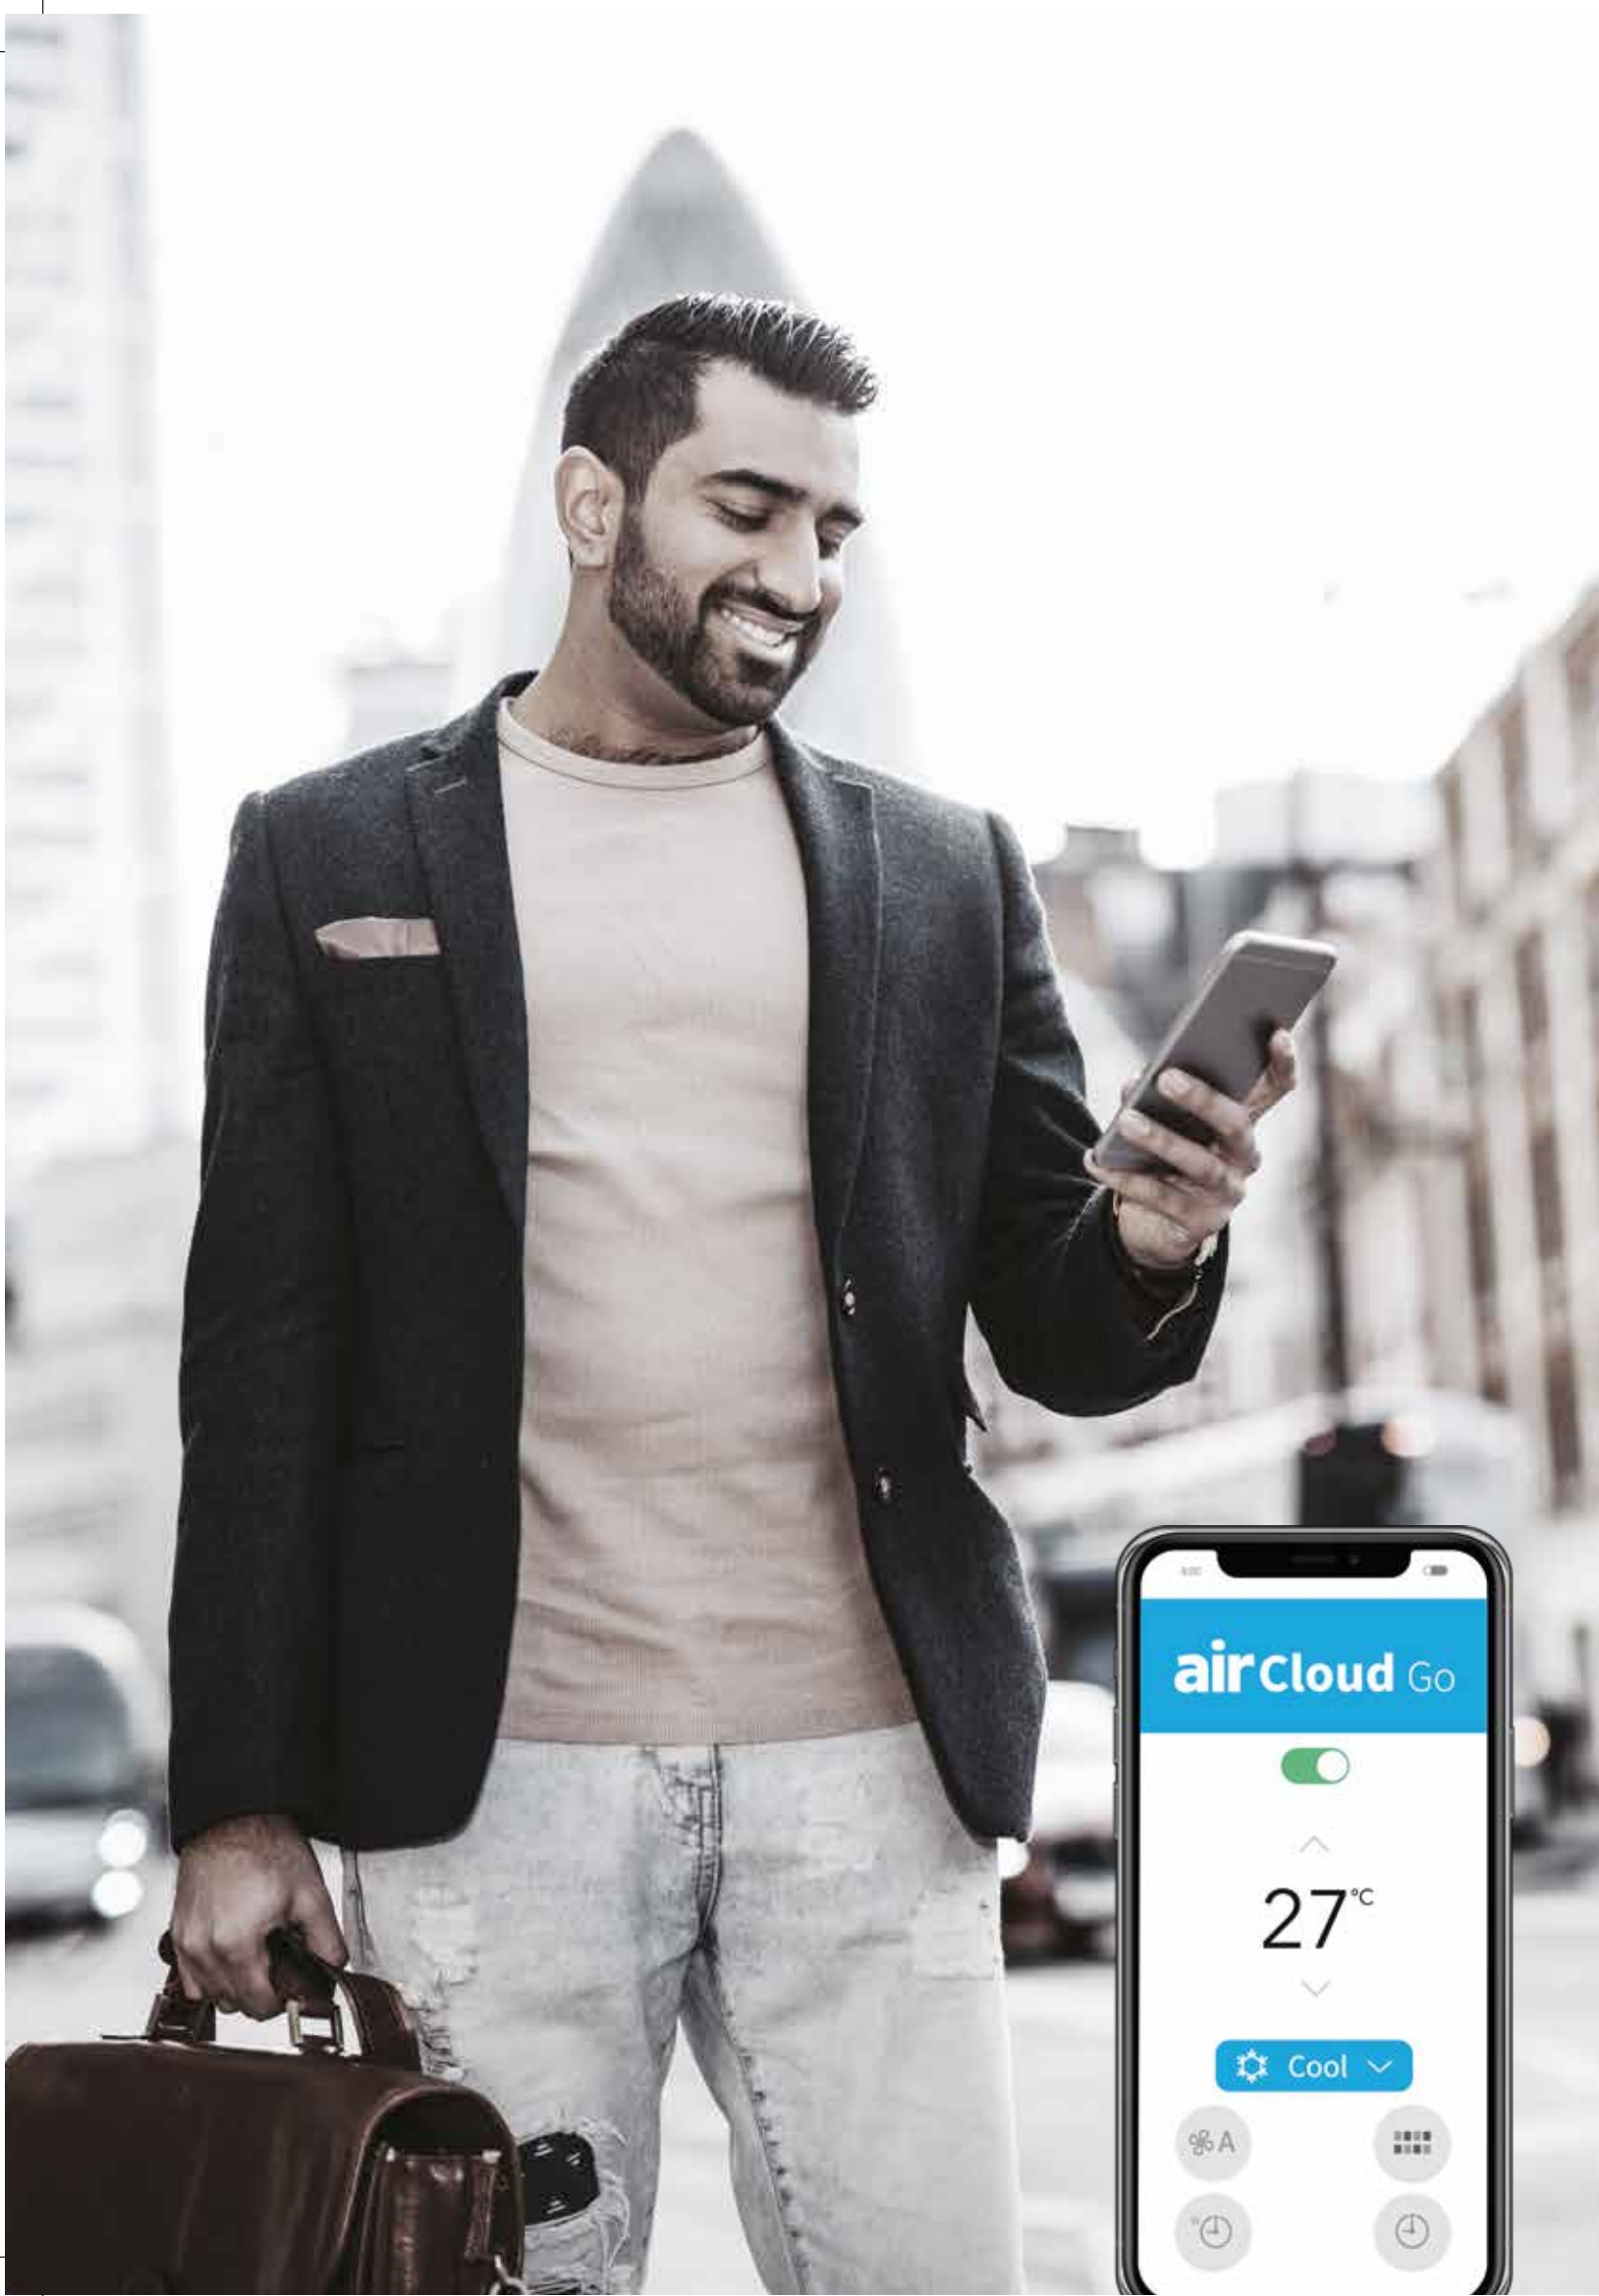

—
airCloud Go
Wi-Fi enabled AC





Remotely control and monitor your system with Hitachi airCloud Go app on smartphone, digital device, or voice assistant for convenient temperature management.



airCloud Go
Mobile App*

Voice Command
Google Home and Amazon Alexa



Voice Controlled
Through Assistant



Smart-Fence

Connect your AC to Smart-Fence feature, and schedule it to turn on/off when you leave/arrive for effortless benefits.



As you arrive home

AC automatically turns on, creating comfortable indoor climate.



As you leave home

AC stops or switches to economic preset temperature to save energy.



Plan to save energy

Intuitively schedule AC use to fit your needs.

Save energy while sleeping with a simple timer, and fit AC operation around your routine with a weekly timer.



Controls made easy

Simplicity of an app

airCloud Go has user-friendly interface to create comfort from smartphone.



Alexa, decrease temperature by 3°C



*Hitachi recommends less than 20 air conditioner to be integrated in one app.



Quick Set up



visit hitachiaircon.com

Available on the App Store

GET IT ON Google Play

Features in the Wi-Fi available are: On/Off, Operation Mode, Set Temperature Change, Adjust Set Temperature, Fan Speed and Operation Status Notification.



SARS-CoV-2¹




99.9%
removal

Bacteria²



99.0%
removal

Odours³



86.0%
removal

Allergens⁴



97.1%
removal

Dust Mite⁵



98.7%
removal

¹ Claim refers to the effect of AQtiv-Ion (optional on some models) which showed 99.9% reduction in COVID virus particles under lab conditions tested at Nara Medical University, Japan

² Claim refers to the effect of AQtiv-Ion (optional on some models) which showed 99.0% reduction in E.Coli particles and Staphylococcus Aureus tested at Boken Quality Evaluation Institute Japan following JIS Z 2801 standard

³ Claim refers to the 86% reduction effect of AQtiv-Ion (optional on some models) on formaldehyde, tested at Kinki Bunseki Center, Ltd. Japan.

⁴ Claim refers to the effect of AQtiv-Ion (optional on some models) on Cedar allergens which shows 97.1% reduction, tested at Institute of Tokyo Environmental Allergy.

⁵ Claim refers to the effect of AQtiv-Ion (optional on some models) on House Dust Mites (98.7% reduction) tested at Viable Ltd. Following JIS-L-1920 standard.



SARS-CoV-2
99.9%^{*1}
reduction

AQtiv-Ion

How it works

The AQtiv-Ion technology generates negative ions. When released into the air, these ions combine with the oxygen (O₂) in the air. These newly-created oxygen molecules trap impurities, viruses, bacteria, odours and allergens, offering healthier air.

Purer air at your demand

Activate AQtiv-Ion with a simple press of a button on the remote control.

AQtiv-Ion works independent of cooling operations without generating extra noise.

The image is for representational purpose only. The actual ac image maybe different from above one.

Iconic Wave Design
Remote






Iconic wave

Artistic curve on remote accentuates aesthetics for delightful AC control.

Remote control

- NEW**
- Iconic wave design
 - Night glow buttons for more visibility
 - Coloured buttons for easy access
 - Can work up to 11 m range*
 - 0.5°C precision control

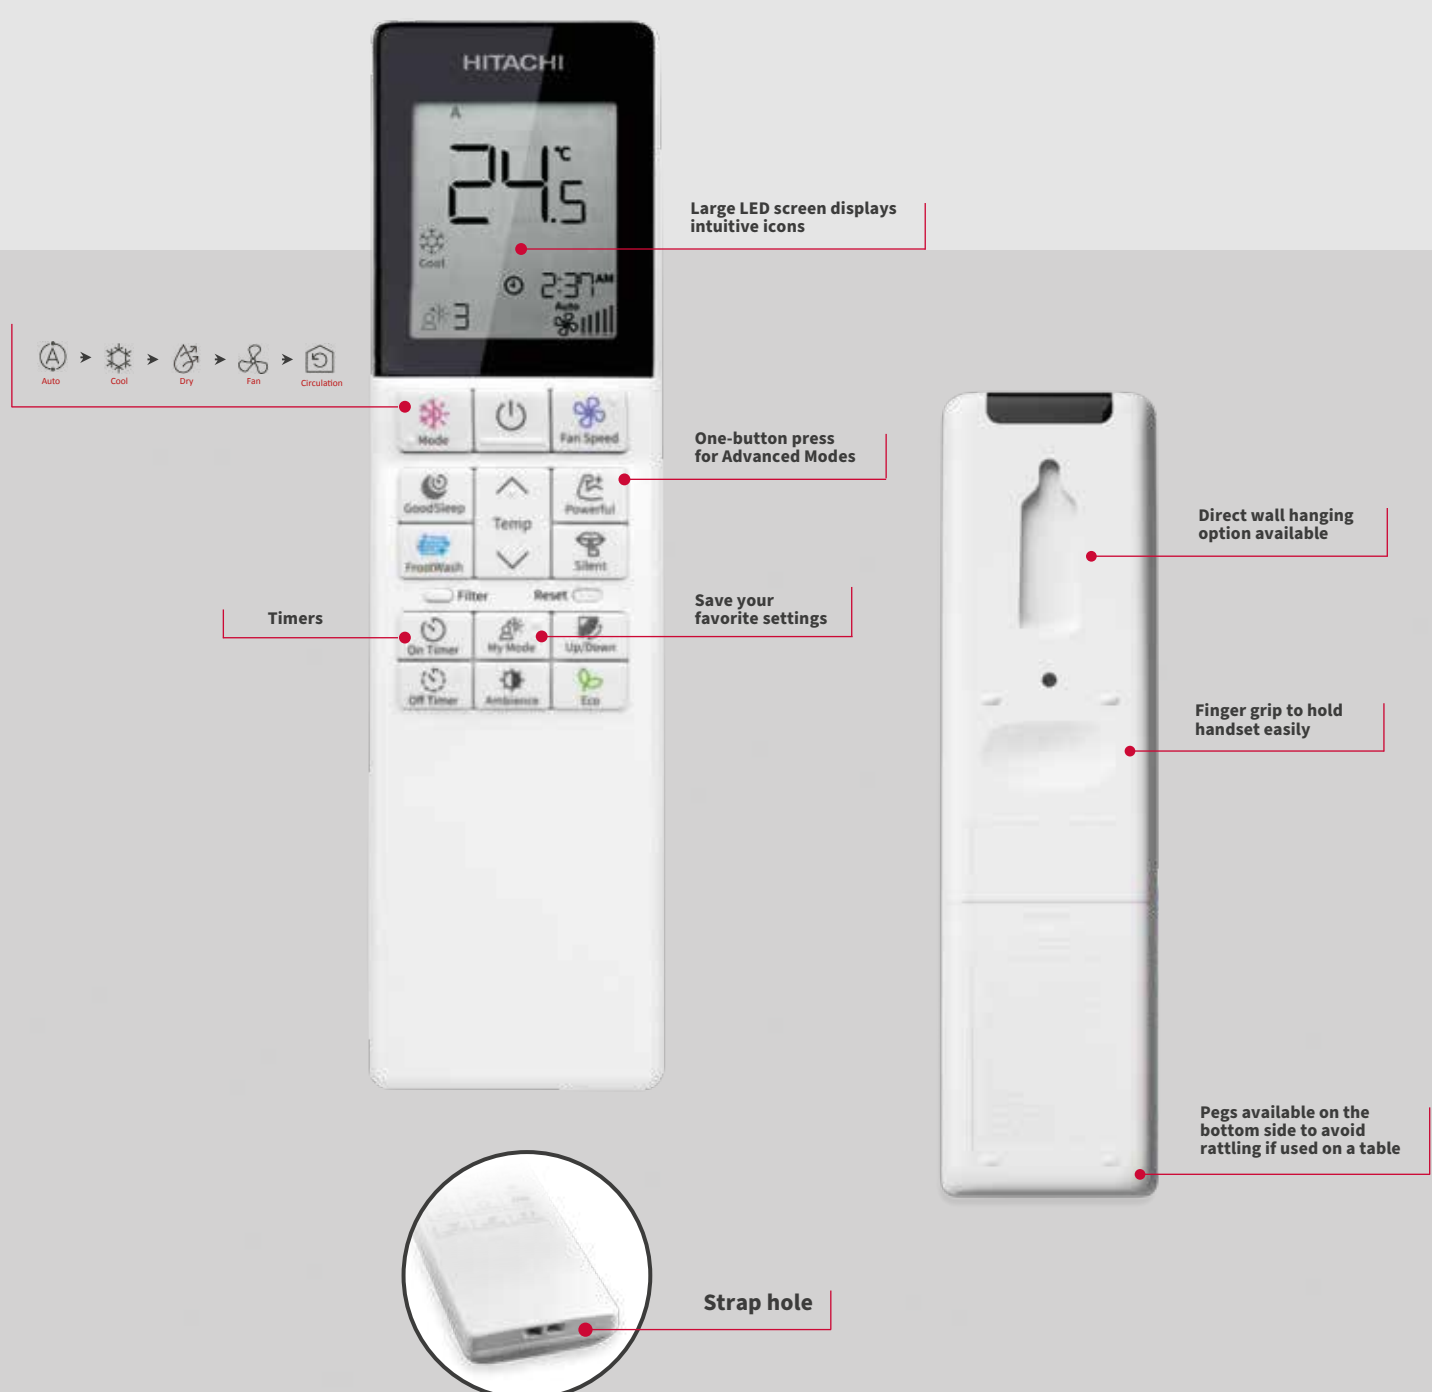

The remote type and features will vary from model to model. The above image is for representational purpose only.
 *Upto 11m when in front of unit at angle 0° without any interference.



My Mode

My Mode has 3 personalized options with temperature, fan speeds, timers, modes, and silent function. Saves time by remembering your preferences.

My Mode illustration:

My Mode	Mode	Temp	Fan Speed	ON/OFF Timer	Silent
	Cool	20.5 °C		OFF	OFF
	Auto	24.0 °C		OFF	OFF
	Dry	27.5 °C		ON	OFF

My Mode settings:

Mode: Auto, Cool, Dry, Fan
Set Temperature: 16-32° C
Fan Speed: Silent, Low, Medium, High, Super High & Auto
ON/OFF Timer: Timer setting up to 12 hours.
Silent: ON/OFF




Default setting is 24 °C and will not be displayed on LCD.

air Technology

Odour-free air



Silent air

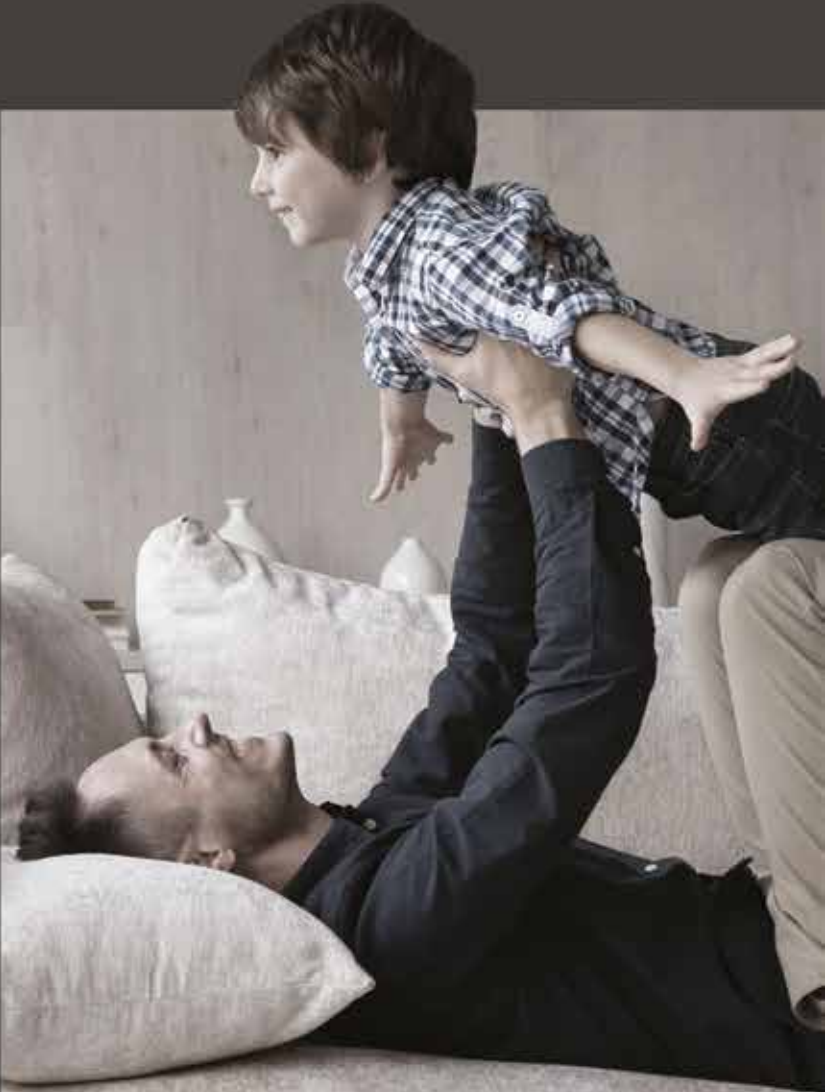

Odour - free air

Auto Coil Dry Technology




**STOPS
ODOUR**

Soft Dry

How does it work?

The unique Auto Coil Dry Technology keeps the indoor fan blower running for some time on standby mode whenever the AC is switched off with remote controller so that it dries up the condensed water accumulated on the evaporator coil. It prevents the accumulation of debris, dust and pollen in the form of condensed water droplets on the evaporator coil and keeps the unit dry and clean to ensure fresh and healthy air.

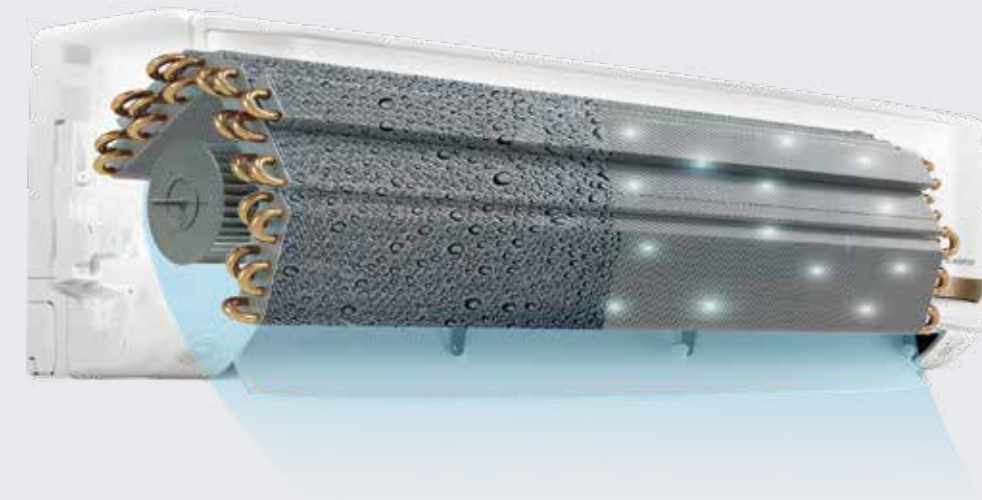


Benefits:

No bad odour with better performance


Prevents accumulation of debris, dust and pollen while preventing growth of potential microbes and moulds which can lead to clogging and contamination of the coils.

Uninterrupted airflow

Provides consistent airflow that gives you optimum cooling.

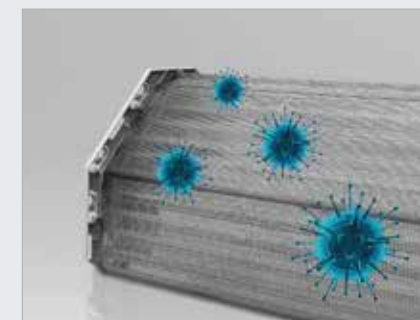


Without Auto Coil Dry

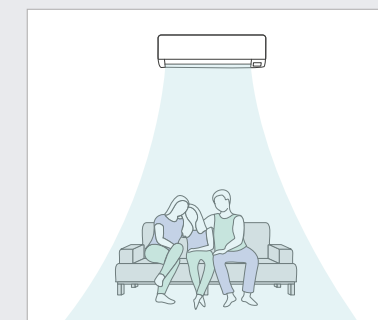

Without Auto Coil Dry



With Auto Coil Dry

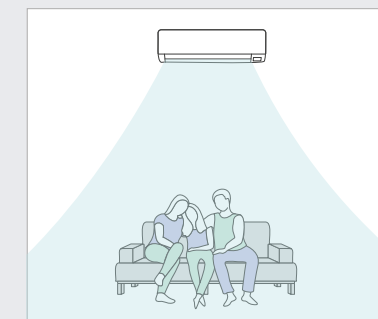

With Auto Coil Dry

The soft dry function can prevent mold growth inside indoor unit but not remove existed mold.

**Product images shown are for reference only, actual product may vary. Data shown above is under test condition & may vary from model to model.*


Silent air

Wave Blade Design Technology

T-flow fan

How does it work?

The Sine Wave Blade design of the indoor fan blower ensures silent air with reduced cutting noise and far-reaching maximum air volume, providing all-around cooling comfort.

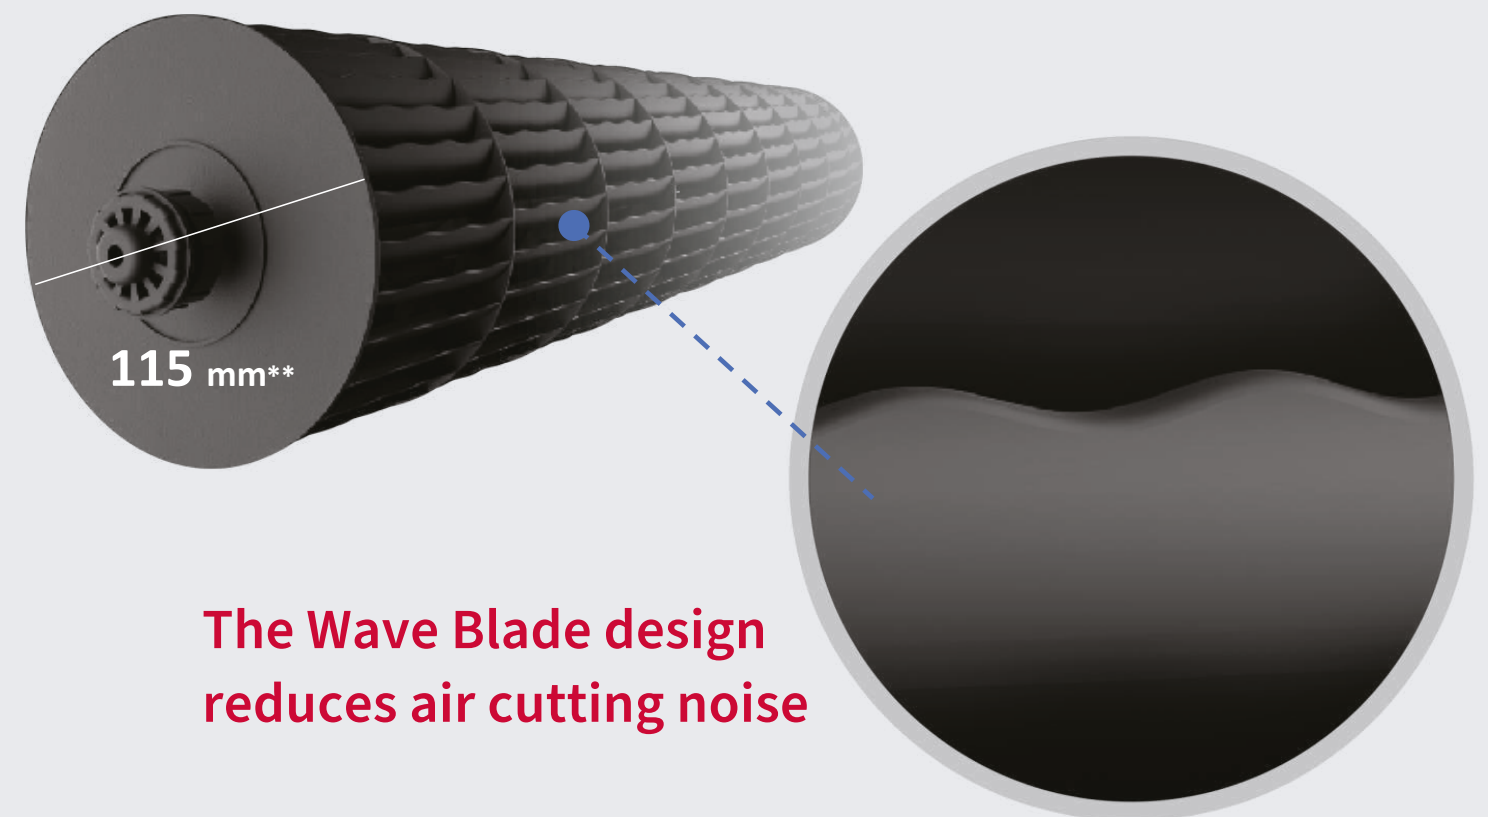

The Wave Blade design
reduces air cutting noise

**Bigger blower compared to conventional AC blower. Product images shown are for reference only, actual product may vary.
Data shown above is under test condition & may vary from model to model.



HEXA

Sensor



Hexa Sensor Technology

Indoor unit

Microcontroller

Outdoor unit



Room Temp.
Sensor



Defrost Sensor



Indoor Humidity
Sensor



Ambient Temp.
Sensor



Compressor
Protection
Sensor



HEX Pressure
Sensor



Room Temperature Sensor

Continuously measures the room temperature and sends signal to microcontroller to maintain optimum cooling and comfort.



Defrost Sensor

Measures refrigerant temperature in the indoor unit to prevent failures due to abnormal conditions.



Ambient Temperature Sensor

The AC adjusts its cooling effect based on outdoor ambient temperature and load variation.



Compressor Protection Sensor

Constantly measures compressor head temperature to ensure proper functioning and prevent failure.



HEX Pressure Sensor

Measures refrigerant temperature and sends signal to microcontroller to maintain optimum performance and ensures safety of product.



Indoor Humidity Sensor

Measures indoor humidity rate required for ice Clean operation.

How does it work?

Hitachi's new Hexa Sensor Technology is equipped with 6 smart sensors – 3 in the Indoor Unit & 3 in the Outdoor Unit, which sense any change in temperature and working of critical components continuously, communicating the same to the microcontroller. This makes Hitachi's AC advanced and ready to offer perfect cooling even in extreme summer conditions.

The image is for illustration purpose only. Available in selected models only.

100% Cooling Capacity @ 43°C

Standard Condition

35°C



Hitachi ACs deliver 100% Capacity

43°C

Hitachi ACs are engineered to work under extreme summer temperatures with 100% cooling capacity. Our machines deliver full capacity without derating even in extreme tropical temperatures.

Dual Louver

Strong & powerful airflow with more air volume



Image is for illustration purpose only. The dual louver is available in selected models only.

5 Fan speed for convenient cooling

More option for fan speed

The BLDC motor in IDU enables 5 variable fan blower speed, with seamless transition between silent to super high speeds, providing reduced noise levels and more speed options.



Easy to clean

The pre-filter can get clogged by the accumulation of dust. A small reminder lights up on your air conditioner when it's time to clean the filter. It's simple to wash, thanks to the easy-to-remove panel and washable filter material.



NEW Outdoor unit

Hitachi prioritizes creating a technology that's
in harmony with its surroundings, serving as
a catalyst for seamless change with their compact, intuitive,
insightful, and aesthetically superior designs.



Anti-Corrosive
Coating
Outdoor Unit



Harmony Line



The product image shown is for representation purpose only and can be changed as per company policy without information. The outdoor unit capacity may vary as per product availability.
Anti-corrosive coating on outdoor brazing joints.



SafeGuard system when you're no longer on site

Our SafeGuard System protects the outdoor unit from extreme weather, voltage fluctuation, pests after installation through a combination of electrical and mechanical systems.



New compressor design

The airHome compressor uses rare earth magnet DC motors, resulting in better-balanced rotation, reduced vibration and noise, and higher efficiency and reliability.




Xpanded Voltage surge protection

Enhanced safety against voltage surges to protect unit

130 ~ 265 V

T&C apply. The voltage range is at rated temperature condition.

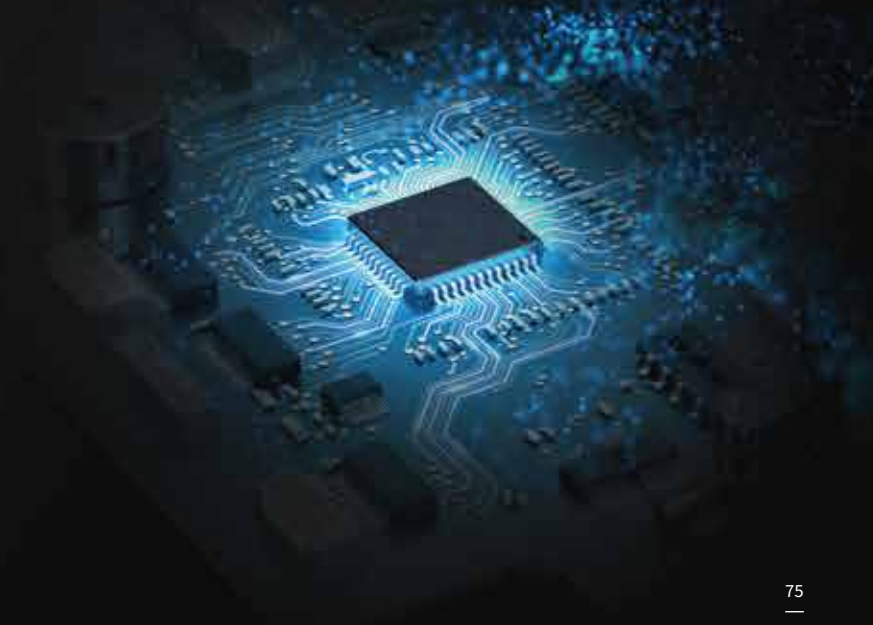

Reason to buy

Hitachi Air Conditioners

1 Ice Clean



An innovative cleaning technology that improves air quality and creates a healthier environment by eliminating dirt.

2 Xpandable*



Hitachi's Xpandable* AC expands its capacity in adverse temperature conditions, it cuts down humidity level inside the room and achieves set temperature faster.

3 Long air throw



An air throw cooling larger spaces and reaching uniformly to every corner up to 24m.

4 Ambience Light



An immersive display on the AC which helps you understand the ambience better and control the temperature more effectively.

5 Bigger Indoor Unit



Bigger unit, bigger suction area, and better draft for a better air experience.


**Bigger
Bolder
Better**

6 airCloud Go



Smarter air control from anywhere with voice command or mobile device for your convenience.

7 4 Way Swing



Better precision to disperse air to every nook and corner.

8 Dual Louver



9 100% Cooling Capacity even at 43°C




10 Hexa Sensor



Hitachi's ingenious 6 Sensor technology that offers perfect cooling and protects its critical parts.

13 Silent air




Ensure air-cutting noise reduction with Wave Blade Design Technology.

11 My Mode




3 Personalized Modes to enjoy cooling experience every time with just a press of a button.

14 5 Fan Speed




The BLDC motor in IDU enables 5 variable fan blower speed, with seamless transition between silent to super high speeds, providing reduced noise levels and more speed options.

12 Odour-free air



Have uninterrupted airflow with the Auto coil dry technology that prevents odour and mold growth inside the AC.

15 Stepless Compressor Control



Specially designed advanced microcontroller checks indoor and outdoor condition, and varies compressor speed seamlessly, thus offering uninterrupted cooling.

16 Tropical Design




Hitachi ACs are designed to keep you cool and work efficiently up to 52°C.

17 Filter Clean Indicator



A unique alert reminds you to clean the filter at regular intervals, ensuring powerful cooling all the time.

18 SuperFine Mesh Filter



Hitachi's unique SuperFine mesh filter captures microdust particle and also offers hassle-free cleaning.

19 SuperSlit Fins



SuperSlit fins of Hitachi AC have multiple slits that provide more heat exchange area and cools the room faster.

20 100% Inner Grooved Copper Tube



Hitachi's 100% inner grooved copper ensures faster cooling with its turbulent refrigerant flow that enhances heat transfer rate.

21 Green Refrigerant



Hitachi ACs are eco-friendly units equipped with R32 & R410A pre-charged refrigerant.

22 Xpanded Voltage Surge Protection

130~265 V**

Enhanced safety against voltage surge to protect the unit.

23 Warranty

5 YEARS ON CONTROLLER/PCB

10 YEARS ON COMPRESSOR

24 Quality Test



Have the benefit of a reliable product that passes all rigorous factory tests.

25 Anti-Corrosive Coating

An outdoor unit with longer life span with anti-corrosive coating on the ODU brazing joints.

Yoshi (よし)

(n) One of the Best

The Shinkansen, aka Bullet Train, is a shining example of Japanese technological ingenuity that transforms possibilities into realities, a near-miraculous feat that encapsulates the essence of Yoshi, which denotes one of the best.

5 Star Inverter AC
★★★★★




iZen (怡然)

(n) Delightful

The enigmatic philosophy of Zen entails mindfulness, experiencing a sense of unity with the peaceful environment, and adopting a distinct approach to cultivating experiences that reveal a fresh perspective.

3 Star Inverter AC
★★★

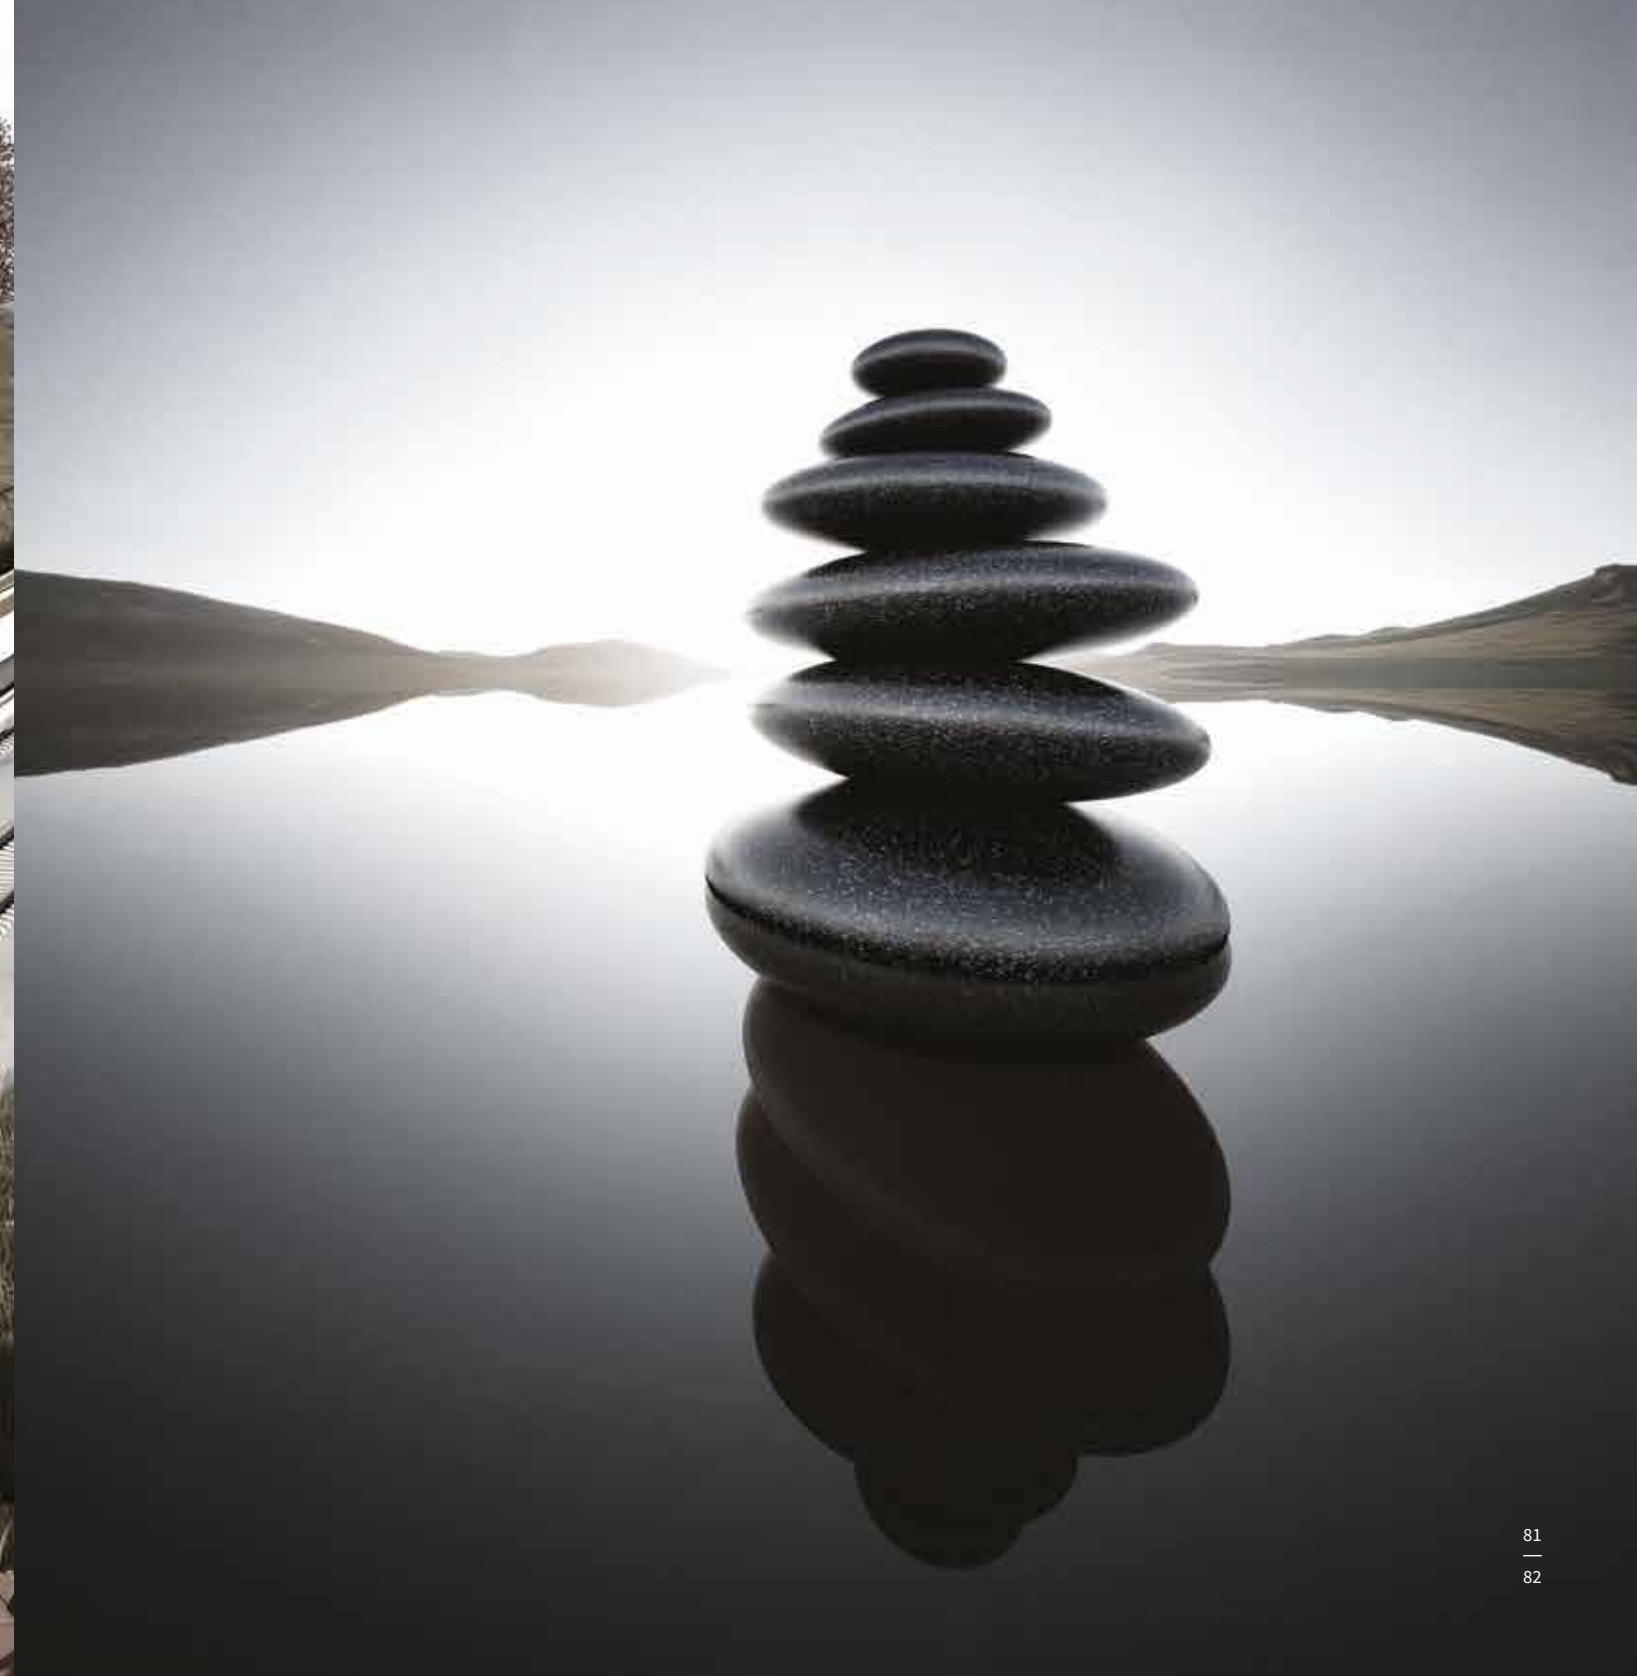


iKasu (いかす)

(n) Smart

The iKasu way of life embodies qualities of intuition, intelligence, and inspiration.
It is fueled by a passion for innovation, which brings the future to your fingertips.

5 & 3 Star Inverter AC
★★★★★
★★★

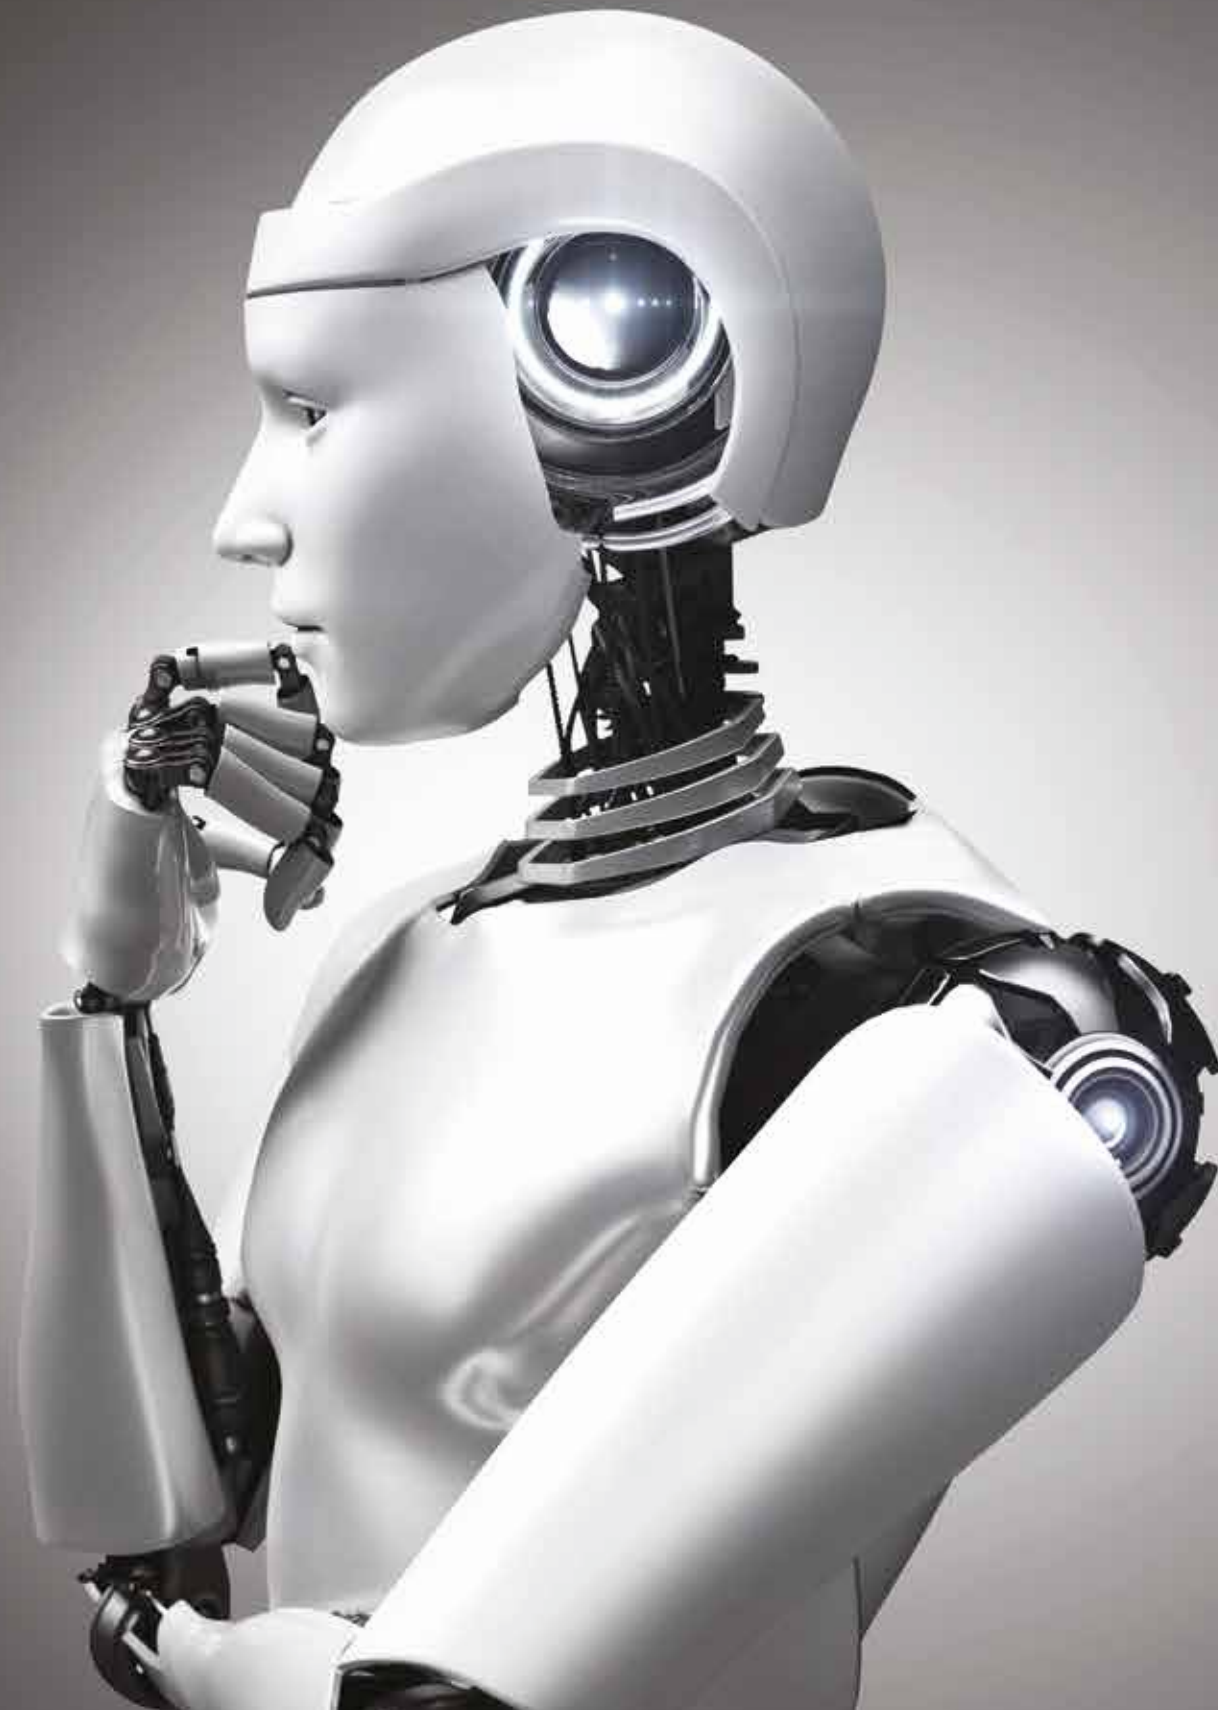

Toushi+ (闘士)

(n) Fighter

Toushi embodies an unyielding spirit, dedicated to mastering combat.
It involves facing challenges with determination, cultivating a warrior's
mindset, and approaching conflicts with resolute dedication.

5 & 3 Star Inverter AC
★★★★★
★★★





Senpai (先輩) (n) Superior

Senpai - the mega architectural structures that last through centuries, thoughtfully built to deter rivals and establish new benchmarks of safety and comfort.

3 Star Fixed Speed AC
★ ★ ★



Shizuka (静か) (n) Quiet

Quint's serene essence embraces unity with a peaceful environment. It involves cherishing subtleties, practicing mindfulness, and adopting a unique approach to crafting experiences that reveal a fresh perspective.

5 Star Window Inverter AC
★ ★ ★ ★ ★

Product Portfolio

One for everyone

Split AC Inverter Series

iZen | 怡然
3 Star Series
★ ★ ★



Yoshi | よし
5 Star Series
★ ★ ★ ★ ★



iKasu | いかす
5 & 3 Star Series
★ ★ ★ ★ ★ | ★ ★ ★



Toushi* | 闘士
5 & 3 Star Series
★ ★ ★ ★ ★ | ★ ★ ★



Split AC Fixed Speed Series



Shizen
4 & 3 Star Hot & Cold Inverter Series
★ ★ ★ ★ | ★ ★ ★



Senpai | 先輩
3 Star Series
★ ★ ★

Window AC Range



Shizuka | 静か
Inverter Series
5 Star Series
★ ★ ★ ★ ★



Kaze Plus | 風
Fixed Speed Series
2 & 3 Star Series
★ ★ | ★ ★ ★



Remote Control



Product Portfolio: Inverter AC

Key Features

- My Mode
- 100% Inner Grooved Copper Tube
- Stepless Compressor Control
- SuperFine Mesh Filter
- Tropical Design
- Stabilizer-Free Operation
- Filter Clean Indicator

Warranty

- 10 Years Compressor
- 5 Years PCB/Controller

Big series

Bigger IDU

- 4 Way Swing
- Dual Louver
- ice Clean
- Xpandable*
- Long air throw
- Hexa Sensor
- Odour-free air
- Silent air
- 100% Cooling Capacity at 43 °C

Bigger
Bolder
Better

1050 mm



Yoshi 5600XXL

The image is for representation purpose only.

Key Features

- My Mode
- 100% Inner Grooved Copper Tube
- Stepless Compressor Control
- SuperFine Mesh Filter
- Tropical Design
- Stabilizer-Free Operation
- Filter Clean Indicator

Warranty

- 10 Years Compressor
- 5 Years PCB/Controller

Ionizer series

Ionizer

- 4 Way Swing
- Xpandable*
- Long air throw
- Hexa Sensor
- Odour-free air
- Silent air
- 100% Cooling Capacity at 43 °C



Yoshi 5500SIXL

The image is for representation purpose only.

Key Features

- My Mode
- 100% Inner Grooved Copper Tube
- Stepless Compressor Control
- SuperFine Mesh Filter
- Tropical Design
- Stabilizer-Free Operation
- Filter Clean Indicator


Warranty

10 Years Compressor
5 Years PCB/Controller

4 Way Swing series

4 Way Swing

- ice Clean
- Xpandable*
- Long air throw
- Hexa Sensor
- Odour-free air
- Silent air
- 100% Cooling Capacity at 43 °C

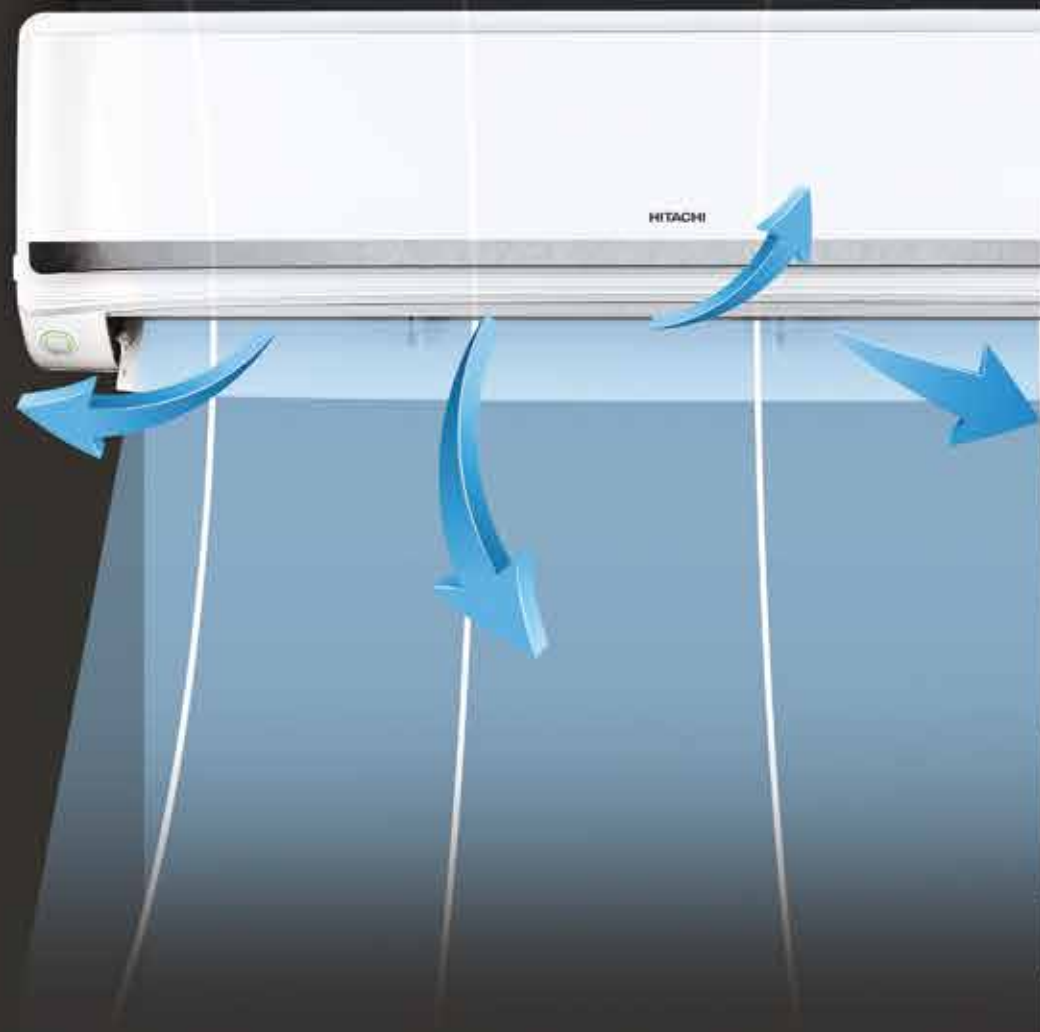

Yoshi 5400SXL



iZen 3400SXL

The image is for representation purpose only.

Key Features

- My Mode
- 100% Inner Grooved Copper Tube
- Stepless Compressor Control
- SuperFine Mesh Filter
- Tropical Design
- Stabilizer-Free Operation
- Filter Clean Indicator

Warranty

10 Years Compressor
5 Years PCB/Controller

Wifi series

airCloud Go

- ice Clean
- Xpandable*
- Long air throw
- 4 Way Swing
- Hexa Sensor
- Odour-free air
- Silent air
- 100% Cooling Capacity at 43 °C



Yoshi 5500SWXL



iZen 3500SWXL

The image is for representation purpose only.

Key Features

- My Mode
- 100% Inner Grooved Copper Tube
- Stepless Compressor Control
- SuperFine Mesh Filter
- Tropical Design
- Stabilizer-Free Operation
- Filter Clean Indicator


Warranty

10 Years Compressor
5 Years PCB/Controller

ice Clean series

ice Clean

- Xpandable*
- Long air throw
- Ambience Light
- Hexa Sensor
- Odour-free air
- Silent air
- 100% Cooling Capacity at 43° C

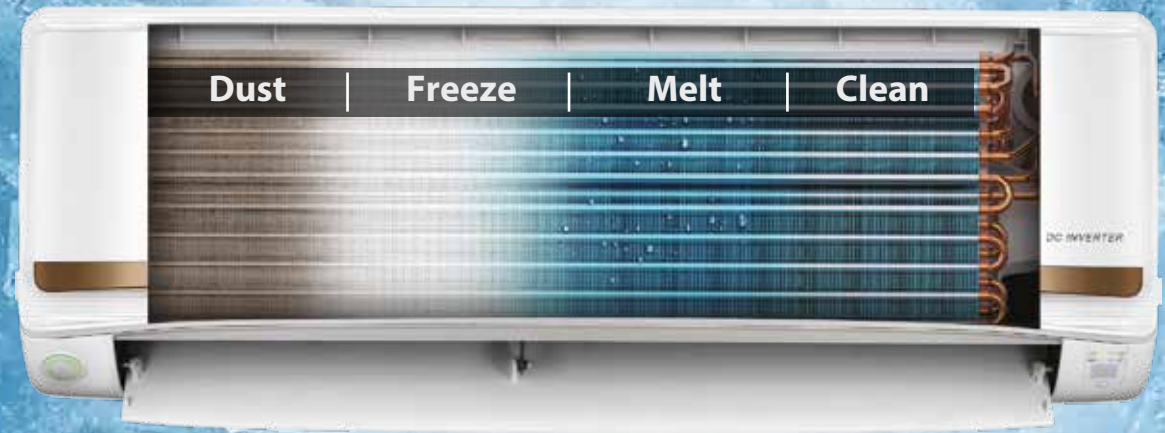

★★★★★
3.5 / 4.9 / 6.1 kW
Yoshi 5400FXL
iKasu 5400FXL

★★★★★
3.5 / 5.0 / 6.3 / 7.0 kW
iZen 3400FXL
iKasu 3400FXL

The image is for representation purpose only.

Key Features

- My Mode
- 100% Inner Grooved Copper Tube
- Stepless Compressor Control
- SuperFine Mesh Filter
- Tropical Design
- Stabilizer-Free Operation
- Filter Clean Indicator

Warranty

10 Years Compressor
5 Years PCB/Controller

Toushi+ series

Xpandable*

- Long air throw
- Penta Sensor
- Odour-free air
- Silent air
- 100% Cooling Capacity at 43° C




★★★★★
3.5 / 4.9 / 6.1 kW
Toushi+ 5200XL

★★★★★
3.5 / 5.0 / 6.3 kW
Toushi+ 3200XL

The image is for representation purpose only.

Product Portfolio: Fixed Speed AC

Key Features




Warranty

10 Years
Compressor

5 Years
PCB/Controller

Key Features

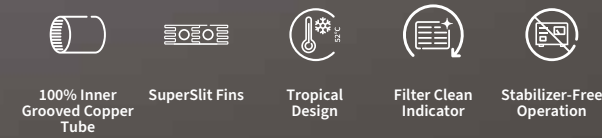


Warranty

5 Years
Compressor

Shizen Hot & Cold series

Hot & Cold AC

- Filter Clean Indicator
- Odour-free air
- Silent air
- 100% Cooling Capacity at 43 °C
- Xpandable

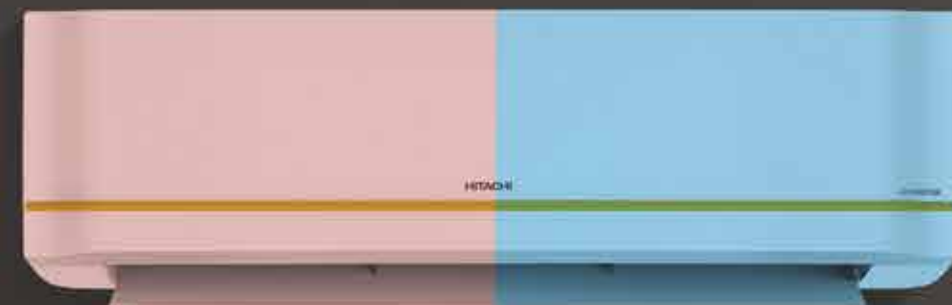

Works for the ambient
temperature range

-15°C to 52°C



Shizen 4100XHP



Shizen 3100SHP

The image is for representation purpose only.

Senpai series

Bigger IDU

- Long air throw
- My Mode
- Ambience Light
- Odour-free air
- Silent air



1050 mm



Senpai 3200FL

The image is for representation purpose only.

Product Portfolio: Window AC

Key Features

- 
100% Inner Grooved Copper Tube
- 
Tropical Design
- 
SuperFine Mesh Filter
- 
Auto Power Save Mode
- 
LCD Remote Control
- 
Auto Fan Speed

Warranty

- 10**
Years
Compressor
- 5**
Years
PCB/Controller

Key Features

- 
100% Inner Grooved Copper Tube
- 
Tropical Design
- 
SuperFine Mesh Filter
- 
Auto Power Save Mode
- 
LCD Remote Control
- 
Auto Fan Speed


Warranty

- 5**
Years
Compressor

Shizuka series

Xpandable Inverter

- 
Filter Clean Indicator
- 
Stabilizer-Free Operation*
- 
Tetra Sensor
- 
Stepless Compressor Control
- 
100% Cooling Capacity at 43°C



Shizuka Inverter Series

4.9 kW

Kaze Plus series

Auto Restart

- 
On/Off Time with Advanced Start-Up
- 
Filter Clean Indicator
- 
Dry Mode
- 
Powerful Mode



Kaze Plus

3.3 kW



Kaze Plus

4.7 kW

The image is for representation purpose only.
*(165 ~ 265V) range for stabilizer free operation.

The image is for representation purpose only.

Tech Data Split AC - Inverter Models

	Description	Unit	5 star Series			5 star Series				
	Model Name		Yoshi 5400FXL	iKasu 5400FXL	Toushi' 5200XL	Yoshi 5600XXL	Yoshi 5500SIXL	Yoshi 5500SWXL	Yoshi 5400FXL	Yoshi 5400SXL
Details	Model Number		RAS.G512PCAISF	RAS.G512PCAIBFE	RAS.E512PCAIBS	RAS.Y518PCAISL1	RAS.V518PCBISI	RAS.V518PCBISH	RAS.G518PCBISF	RAS.G518PCBISS
	Star Rating		5	5	5	5	5	5	5	5
	Compressor	Type / Refrigerant	Rotary / R32	Rotary / R32	Rotary / R32	Rotary / R32	Rotary / R32	Rotary / R32	Rotary / R32	Rotary / R32
Performance	Rated Cooling (100 % load)	BTU/Hr (Watts)	11800 (3458)	11800 (3458)	11800 (3458)	18500 (5422)	16720(4900)	16720(4900)	16720(4900)	16720(4900)
	Maximum Cooling	BTU/Hr (Watts)	12980 (3804)	12980 (3804)	12980 (3804)	20500 (6008)	18426(5400)	18426(5400)	18426(5400)	18426(5400)
	Rated ISEER		5.02	5.02	5.02	5.10	5.00	5.00	5.00	5.00
	Annual Power Consumption (As per BEE Norms)	(kWh)	533.61	533.61	533.61	823.18	758.52	758.52	758.52	758.52
	Fan Speed	No. of steps	5	5	5	5	5	5	5	5
	Air Flow (IDU) (Cooling-Super High)	CFM	406	406	406	635	530	530	530	530
	Sound level *1	dbA	32	32	32	37	34	34	34	34
Electrical	Rated Power Supply	Volts / Hz / Phase	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1
	Rated Power Input	Watts	875	875	875	1365	1310	1310	1310	1310
	Rated Current Drawn	Amps	4.00	4.00	4.00	6.25	6.00	6.00	6.00	6.00
Key Features	Bigger IDU - 1050 mm					√				
	Dual Louver					√				
	Ice Clean (FrostWash)		√	√		√		√	√	√
	AQ-tiv Ion (Ionizer)						√			
	airCloud Home -Wifi Enabled							√		
	4 Way Swing					√	√	√		√
	Xpandable*		√	√	√	√	√	√	√	√
	Long air throw *2		√	√	√	√	√	√	√	√
	Ambience Light		√	√					√	
	Odour-free air (Soft Dry)		√	√	√	√	√	√	√	√
	Silent air (Wave Blade Design)		√	√	√	√	√	√	√	√
Remote Features	My Mode		√	√	√	√	√	√	√	√
	Backlight Remote controller		√	√	√	√	√	√	√	√
	Powerful Mode		√	√	√	√	√	√	√	√
	One Touch Super Silent		√	√	√	√	√	√	√	√
	ECO Mode		√	√	√	√	√	√	√	√
	Good Sleep mode		√	√	√	√	√	√	√	√
	On / Off Timer		√	√	√	√	√	√	√	√
	Real Time Clock/ On/Off timer (24 hours)		√*	√*	√*	√	√	√	√*	√
Advance Features	Hexa Sensor		√	√	√**	√	√	√	√	√
	Tropical Design up to 52°C		√	√	√	√	√	√	√	√
	100% Inner Grooved Copper Tubes		√	√	√	√	√	√	√	√
	SuperSlit Fins		√	√	√	√	√	√	√	√
	Filter clean indicator		√	√	√	√	√	√	√	√
	SuperFine Mesh filter		√	√	√	√	√	√	√	√
	Up/Down Swing		√	√	√	√	√	√	√	√
	Stabilizer Free Operation		√	√	√	√	√	√	√	√
	Hydrophilic Fins (Indoor Unit)		√	√	√	√	√	√	√	√
Assurance*	Compressor Warranty	1 + 9 Years	√	√	√	√	√	√	√	√
	Controller (PCB) Warranty	1 + 4 Years	√	√	√	√	√	√	√	√
	Warranty on Entire Machine	1 Year	√	√	√	√	√	√	√	√
Dimensions	Dimension (IDU) (W x H x D)	mm	780 x 280 x 227	780 x 280 x 222	780 x 280 x 222	1050 x 294 x 255	950 x 294 x 235	950 x 294 x 235	950 x 294 x 235	950 x 294 x 235
	Dimension (ODU) (W x H x D)	mm	658 x 530 x 274	658 x 530 x 274	658 x 530 x 274	750 x 550 x 290	750 x 550 x 290	750 x 550 x 290	750 x 550 x 290	750 x 550 x 290
	Suction Line Diameter	mm (Inches)	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")	12.7(1/2")	12.7(1/2")	12.7(1/2")	12.7(1/2")	12.7(1/2")
	Liquid Line Diameter	mm (Inches)	6.35 (1/4")	6.35 (1/4")	6.35 (1/4")	6.35(1/4")	6.35(1/4")	6.35(1/4")	6.35(1/4")	6.35(1/4")
	Net Weight IDU /ODU	Kg	8.5 / 25.4	8.5/25.4	8.5/25.4	11.4/29.4	10.0/28.5	10.0/28.5	10.0/28.5	10.0/28.5

Notes:
Unit performance confirms to IS1391-2.
Auto Mode, Cool Mode, Fan Mode, Dry Mode (better humidity control), LCD Remote Control, Auto Fan Speed, Auto Restart, Green Refrigerant, features are available in every model.
*1 At Super Silent fan speed & at a distance of 1 m.
*2 Air flow range for long air throw will vary as per chassis/ tonnage, 24 mtr. in 1050 mm, 18 mtr. in 950 mm & 12 mtr. in 780 mm in fan mode.
Permissible maximum pipe length limit is up to 25 mtrs
Features may vary from model to model. Due to continuous research & development, specifications & features may change without prior notice.
#T&C apply. Offer available on select models only and subject to company's discretion. Offer can be withdrawn anytime without prior notice.
*It indicates that unit has 12 hour On/Off timer.
**It indicates that the model has penta sensors.

Tech Data Split AC - Inverter Models

	Description	Unit	5 star Series				5 star Series		
	Model Name		iKasu 5400FXL	Toushi* 5200XL	Yoshi 5500SWXL	Yoshi 5400SXL	Yoshi 5400FXL	iKasu 5400FXL	Toushi* 5200XL
Details	Model Number		RAS.G518PCBIBF	RAS.E518PCBIB	RAS.V522PCBISH	RAS.G522PCBISS	RAS.G522PCBISF	RAS.G522PCBIBF	RAS.E522PCBIB
	Star Rating		5	5	5	5	5	5	5
	Compressor	Type / Refrigerant	Rotary /R32	Rotary / R32	Twin Rotary / R32	Twin Rotary / R32	Twin Rotary / R32	Twin Rotary / R32	Twin Rotary / R32
Performance	Rated Cooling (100 % load)	BTU/Hr (Watts)	16720(4900)	16720(4900)	20814 (6100)	20814 (6100)	20814 (6100)	20814 (6100)	20814 (6100)
	Maximum Cooling	BTU/Hr (Watts)	18426(5400)	18426(5400)	22520 (6600)	22520 (6600)	22520 (6600)	22520 (6600)	22520 (6600)
	Rated ISEER		5	5	5.00	5.00	5.00	5.00	5.00
	Annual Power Consumption (As per BEE Norms)	(kWh)	758.52	758.52	943.52	943.52	943.52	943.52	943.52
	Fan Speed	No. of steps	5	5	5	5	5	5	5
	Air Flow (IDU) (Cooling-Super High)	CFM	530	530	635	635	635	635	635
	Sound level *1	dbA	34	34	37	37	37	37	37
Electrical	Rated Power Supply	Volts / Hz / Phase	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1
	Rated Power Input	Watts	1310	1310	1675	1675	1675	1675	1675
	Rated Current Drawn	Amps	6	6	7.70	7.70	7.70	7.70	7.70
Key Features	Bigger IDU - 1050 mm				√	√	√	√	√
	Dual Louver								
	Ice Clean (FrostWash)		√		√	√	√	√	
	AQ-tiv Ion (Ionizer)								
	airCloud Home -Wifi Enabled				√				
	4 Way Swing				√	√			
	Xpandable*		√	√	√	√	√	√	√
	Long air throw *2		√	√	√	√	√	√	√
	Ambience Light		√				√	√	
	Odour-free air (Soft Dry)		√	√	√	√	√	√	√
	Silent air (Wave Blade Design)		√	√	√	√	√	√	√
Remote Features	My Mode		√	√	√	√	√	√	√
	Backlight Remote controller		√	√	√	√	√	√	√
	Powerful Mode		√	√	√	√	√	√	√
	One Touch Super Silent		√	√	√	√	√	√	√
	ECO Mode		√	√	√	√	√	√	√
	Good Sleep mode		√	√	√	√	√	√	√
	On / Off Timer		√	√	√	√	√	√	√
	Real Time Clock/ On/Off timer (24 hours)		√*	√*	√	√	√*	√*	√*
Advance Features	Hexa Sensor		√	√**	√	√	√	√	√**
	Tropical Design up to 52°C		√	√	√	√	√	√	√
	100% Inner Grooved Copper Tubes		√	√	√	√	√	√	√
	SuperSlit Fins		√	√	√	√	√	√	√
	Filter clean indicator		√	√	√	√	√	√	√
	SuperFine Mesh filter		√	√	√	√	√	√	√
	Up/Down Swing		√	√	√	√	√	√	√
	Stabilizer Free Operation		√	√	√	√	√	√	√
	Hydrophilic Fins (Indoor Unit)		√	√	√	√	√	√	√
Assurance*	Compressor Warranty	1 + 9 Years	√	√	√	√	√	√	√
	Controller (PCB) Warranty	1 + 4 Years	√	√	√	√	√	√	√
	Warranty on Entire Machine	1 Year	√	√	√	√	√	√	√
Dimensions	Dimension (IDU) (W x H x D)	mm	950 x 294 x 230	950 x 294 x 230	1050 x 294 x 255	1050 x 294 x 255	1050 x 294 x 255	1050 x 294 x 250	1050 x 294 x 250
	Dimension (ODU) (W x H x D)	mm	750 x 550 x 290	750 x 550 x 290	800 x 640 x 298	800 x 640 x 298	800 x 640 x 298	800 x 640 x 298	800 x 640 x 298
	Suction Line Diameter	mm (Inches)	12.7(1/2")	12.7(1/2")	15.8(5/8")	15.8(5/8")	15.8(5/8")	15.8(5/8")	15.8(5/8")
	Liquid Line Diameter	mm (Inches)	6.35(1/4")	6.35(1/4")	6.35(1/4")	6.35(1/4")	6.35(1/4")	6.35(1/4")	6.35(1/4")
	Net Weight IDU /ODU	Kg	10.0/28.5	10.0/28.5	11.4/34.8	11.4/34.8	11.4/34.8	11.4/34.8	11.4/34.8

Notes:
Unit performance confirms to IS1391-2.
Auto Mode, Cool Mode, Fan Mode, Dry Mode (better humidity control), LCD Remote Control, Auto Fan Speed, Auto Restart, Green Refrigerant, features are available in every model.
*1 At Super Silent fan speed & at a distance of 1 m.
*2 Air flow range for long air throw will vary as per chassis/ tonnage, 24 mtr. in 1050 mm, 18 mtr. in 950 mm & 12 mtr. in 780 mm in fan mode.
Permissible maximum pipe length limit is up to 25 mtrs
Features may vary from model to model. Due to continuous research & development, specifications & features may change without prior notice.
#T&C apply. Offer available on select models only and subject to company's discretion. Offer can be withdrawn anytime without prior notice.
*It indicates that unit has 12 hour On/Off timer.
**It indicates that the model has penta sensors.

Tech Data Split AC - Inverter Models

	Description	Unit	3 star Series			3 star Series				
	Model Name		iZen 3400FXL	iKasu 3400FXL	Toushi' 3200XL	iZen 3500SWXL	iZen 3400SXL	iZen 3400FXL	iKasu 3400FXL	Toushi' 3200XL
Details	Model Number		RAS.G312PCAISF	RAS.G312PCAIBFE	RAS.E312PCAIBS	RAS.V318PCBISH	RAS.G318PCBISS	RAS.G318PCBISF	RAS.G318PCBIBF	RAS.E318PCBIB
	Star Rating		3	3	3	3	3	3	3	3
	Compressor	Type / Refrigerant	Rotary / R32	Rotary / R32	Rotary / R32	Rotary / R32	Rotary / R32	Rotary / R32	Rotary / R32	Rotary / R32
Performance	Rated Cooling (100 % load)	BTU/Hr (Watts)	11800 (3458)	11800 (3458)	11800 (3458)	17060 (5000)	17060 (5000)	17060 (5000)	17060 (5000)	17060 (5000)
	Maximum Cooling	BTU/Hr (Watts)	12600 (3692)	12600 (3692)	12600 (3692)	18084 (5300)	18084 (5300)	18084 (5300)	18084 (5300)	18084 (5300)
	Rated ISEER		4.00	4.00	4.00	3.82	3.82	3.82	3.82	3.82
	Annual Power Consumption (As per BEE Norms)	(kWh)	669.16	669.16	669.16	1012.62	1012.62	1012.62	1012.62	1012.62
	Fan Speed	No. of steps	5	5	5	5	5	5	5	5
	Air Flow (IDU) (Cooling-Super High)	CFM	406	406	406	530	530	530	530	530
	Sound level *1	dbA	32	32	32	34	34	34	34	34
Electrical	Rated Power Supply	Volts / Hz / Phase	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1
	Rated Power Input	Watts	1095	1095	1095	1940	1940	1940	1940	1940
	Rated Current Drawn	Amps	5.00	5.00	5.00	8.8	8.8	8.8	8.8	8.8
Key Features	Bigger IDU - 1050 mm									
	Dual Louver									
	Ice Clean (FrostWash)		√	√		√	√	√	√	
	AQ-tiv Ion (Ionizer)									
	airCloud Home -Wifi Enabled					√				
	4 Way Swing					√	√			
	Xpandable*		√	√	√	√	√	√	√	√
	Long air throw *2		√	√	√	√	√	√	√	√
	Ambience Light		√	√				√	√	
	Odour-free air (Soft Dry)		√	√	√	√	√	√	√	√
	Silent air (Wave Blade Design)		√	√	√	√	√	√	√	√
Remote Features	My Mode		√	√	√	√	√	√	√	√
	Backlight Remote controller		√	√	√	√	√	√	√	√
	Powerful Mode		√	√	√	√	√	√	√	√
	One Touch Super Silent		√	√	√	√	√	√	√	√
	ECO Mode		√	√	√	√	√	√	√	√
	Good Sleep mode		√	√	√	√	√	√	√	√
	On / Off Timer		√	√	√	√	√	√	√	√
	Real Time Clock/ On/Off timer (24 hours)		√*	√*	√*	√	√	√*	√*	√*
Advance Features	Hexa Sensor		√	√	√**	√	√	√	√	√**
	Tropical Design up to 52°C		√	√	√	√	√	√	√	√
	100% Inner Grooved Copper Tubes		√	√	√	√	√	√	√	√
	SuperSlit Fins		√	√	√	√	√	√	√	√
	Filter clean indicator		√	√	√	√	√	√	√	√
	SuperFine Mesh filter		√	√	√	√	√	√	√	√
	Up/Down Swing		√	√	√	√	√	√	√	√
	Stabilizer Free Operation		√	√	√	√	√	√	√	√
	Hydrophilic Fins (Indoor Unit)		√	√	√	√	√	√	√	√
Assurance*	Compressor Warranty	1 + 9 Years	√	√	√	√	√	√	√	√
	Controller (PCB) Warranty	1 + 4 Years	√	√	√	√	√	√	√	√
	Warranty on Entire Machine	1 Year	√	√	√	√	√	√	√	√
Dimensions	Dimension (IDU) (W x H x D)	mm	780 x 280 x 227	780 x 280 x 222	780 x 280 x 222	950 x 294 x 235	950 x 294 x 235	950 x 294 x 235	950 x 294 x 230	950 x 294 x 230
	Dimension (ODU) (W x H x D)	mm	658 x 530 x 274	658 x 530 x 274	658 x 530 x 274	750 x 550 x 290	750 x 550 x 290	750 x 550 x 290	750 x 550 x 290	750 x 550 x 290
	Suction Line Diameter	mm (Inches)	9.52(3/8")	9.52(3/8")	9.52(3/8")	12.7(1/2")	12.7(1/2")	12.7(1/2")	12.7(1/2")	12.7(1/2")
	Liquid Line Diameter	mm (Inches)	6.35(1/4")	6.35(1/4")	6.35(1/4")	6.35(1/4")	6.35(1/4")	6.35(1/4")	6.35(1/4")	6.35(1/4")
	Net Weight IDU /ODU	Kg	7.8/24.4	7.8/24.4	7.8/24.4	10.0/27.4	10.0/27.4	10.0/27.4	10.0/27.4	10.0/27.4

Notes:
Unit performance confirms to IS1391-2.
uto Mode, Cool Mode, Fan Mode, Dry Mode (better humidity control), LCD Remote Control, Auto Fan Speed, Auto Restart, Green Refrigerant, features are available in every model.
*1 At Super Silent fan speed & at a distance of 1 m.
*2 Air flow range for long air throw will vary as per chassis/ tonnage, 24 mtr. in 1050 mm, 18 mtr. in 950 mm & 12 mtr. in 780 mm in fan mode.
Permissible maximum pipe length limit is up to 25 mtrs
Features may vary from model to model. Due to continuous research & development, specifications & features may change without prior notice.
#T&C apply. Offer available on select models only and subject to company's discretion. Offer can be withdrawn anytime without prior notice.
*It indicates that unit has 12 hour On/Off timer.
**It indicates that the model has penta sensors.

Tech Data Split AC - Inverter Models

	Description	Unit	3 star Series				3 star Series		
	Model Name		iZen 3500SWXL	iZen 3400SXL	iZen 3400FXL	iKasu 3400FXL	Toushi' 3200XL	iZen 3400SXL	iZen 3400FXL
Details	Model Number		RAS.V322PCBISH	RAS.G322PCBISS	RAS.G322PCBISF	RAS.G322PCBIBF	RAS.E322PCBIB	RAS.G324PCBISS	RAS.G324PCBISF
	Star Rating		3	3	3	3	3	3	3
	Compressor	Type / Refrigerant	Twin Rotary / R32	Twin Rotary / R32	Twin Rotary / R32	Twin Rotary / R32	Twin Rotary / R32	Twin Rotary / R32	Twin Rotary / R32
Performance	Rated Cooling (100 % load)	BTU/Hr (Watts)	21500 (6300)	21500 (6300)	21500 (6300)	21500 (6300)	21500 (6300)	23715 (6950)	23715 (6950)
	Maximum Cooling	BTU/Hr (Watts)	23000 (6740)	23000 (6740)	23000 (6740)	23000 (6740)	23000 (6740)	25080 (7350)	25080 (7350)
	Rated ISEER		3.82	3.82	3.82	3.82	3.82	3.82	3.82
	Annual Power Consumption (As per BEE Norms)	(kWh)	1277.22	1277.22	1277.22	1277.22	1277.22	1409.41	1409.41
	Fan Speed	No. of steps	5	5	5	5	5	5	5
	Air Flow (IDU) (Cooling-Super High)	CFM	530	530	530	530	530	635	635
	Sound level *1	dbA	37	37	37	37	37	37	37
Electrical	Rated Power Supply	Volts / Hz / Phase	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1
	Rated Power Input	Watts	2235	2235	2235	2235	2235	2480	2480
	Rated Current Drawn	Amps	10.23	10.23	10.23	10.23	10.23	11.35	11.35
Key Features	Bigger IDU - 1050 mm							√	√
	Dual Louver								
	Ice Clean (FrostWash)		√	√	√	√		√	√
	AQ-tiv Ion (Ionizer)								
	airCloud Home -Wifi Enabled		√						
	4 Way Swing		√	√				√	
	Xpandable*		√	√	√	√	√	√	√
	Long air throw *2		√	√	√	√	√	√	√
	Ambience Light				√	√			√
	Odour-free air (Soft Dry)		√	√	√	√	√	√	√
	Silent air (Wave Blade Design)		√	√	√	√	√	√	√
Remote Features	My Mode		√	√	√	√	√	√	√
	Backlight Remote controller		√	√	√	√	√	√	√
	Powerful Mode		√	√	√	√	√	√	√
	One Touch Super Silent		√	√	√	√	√	√	√
	ECO Mode		√	√	√	√	√	√	√
	Good Sleep mode		√	√	√	√	√	√	√
	On / Off Timer		√	√	√	√	√	√	√
	Real Time Clock/ On/Off timer (24 hours)		√	√	√*	√*	√*	√	√*
Advance Features	Hexa Sensor		√	√	√	√	√**	√	√
	Tropical Design up to 52°C		√	√	√	√	√	√	√
	100% Inner Grooved Copper Tubes		√	√	√	√	√	√	√
	SuperSlit Fins		√	√	√	√	√	√	√
	Filter clean indicator		√	√	√	√	√	√	√
	SuperFine Mesh filter		√	√	√	√	√	√	√
	Up/Down Swing		√	√	√	√	√	√	√
	Stabilizer Free Operation		√	√	√	√	√	√	√
	Hydrophilic Fins (Indoor Unit)		√	√	√	√	√	√	√
Assurance*	Compressor Warranty	1 + 9 Years	√	√	√	√	√	√	√
	Controller (PCB) Warranty	1 + 4 Years	√	√	√	√	√	√	√
	Warranty on Entire Machine	1 Year	√	√	√	√	√	√	√
Dimensions	Dimension (IDU) (W x H x D)	mm	950 x 294 x 235	950 x 294 x 235	950 x 294 x 235	950 x 294 x 230	950 x 294 x 230	1050 X 294 X 255	1050 X 294 X 255
	Dimension (ODU) (W x H x D)	mm	800 x 640 x 298	800 x 640 x 298	800 x 640 x 298	800 x 640 x 298	800 x 640 x 298	800 x 640 x 298	800 x 640 x 298
	Suction Line Diameter	mm (Inches)	12.7(1/2")	12.7(1/2")	12.7(1/2")	12.7(1/2")	12.7(1/2")	15.8(5/8")	15.8(5/8")
	Liquid Line Diameter	mm (Inches)	6.35(1/4")	6.35(1/4")	6.35(1/4")	6.35(1/4")	6.35(1/4")	6.35(1/4")	6.35(1/4")
	Net Weight IDU /ODU	Kg	9.6/32.9	9.6/32.9	9.6/32.9	9.6/32.9	9.6/32.9	11.4/34.7	11.4/34.7

Notes:
Unit performance confirms to IS1391-2.
Auto Mode, Cool Mode, Fan Mode, Dry Mode (better humidity control), LCD Remote Control, Auto Fan Speed, Auto Restart, Green Refrigerant, features are available in every model.
*1 At Super Silent fan speed & at a distance of 1 m.
*2 Air flow range for long air throw will vary as per chassis/ tonnage, 24 mtr. in 1050 mm, 18 mtr. in 950 mm & 12 mtr. in 780 mm in fan mode.
Permissible maximum pipe length limit is up to 25 mtrs
Features may vary from model to model. Due to continuous research & development, specifications & features may change without prior notice.
#T&C apply. Offer available on select models only and subject to company's discretion. Offer can be withdrawn anytime without prior notice.
*It indicates that unit has 12 hour On/Off timer.
**It indicates that the model has penta sensors.

Tech Data Split AC - Hot & Cold Models

	Model Name		Shizen 4100XHP	Shizen 3100SHP
Details	Model Number		RMRG422HFXO	RSQG318HGXA
	Star Rating		4	3
	Compressor	Type / Refrigerant	Tropical Twin Rotary / R32	Tropical Rotary / R410A
Performance	Rated Cooling Capacity (100 % load)		21837 (6400)	17400 (5100)
	Rated Heating Capacity (100 % load)		24000 (7033)	18100 (5300)
	Maximum Cooling Capacity		23032 (6750)	18350 (5360)
	Maximum Heating Capacity		25590 (7500)	19000 (5570)
	Rated ISEER		4.50	3.80
	Annual Power Consumption (As per BEE Norms) (kWh)		1101.16	1040.20
	Fan Speed	No. of steps	5	5
	Air Flow (IDU) (Cooling/Heating -Super High)	CFM	620/583	530/460
	Sound level* -Cooling/Heating	dBA	35/34	33/32
Electrical	Rated Power Supply	Volts/Hz/Phase	230/50/1	230/50/1
	Rated Power Input-Cooling/Heating	Watts	1900/2200	1847/1500
	Rated Current Drawn-Cooling/Heating	Amps	8.30/10.00	8.45 / 6.86
Key Features	Iconic Wave Design		√	√
	Silent air /odour-free air/Surround air		√	√
	Xpandable		√	√
	Tropical Design up to 52°C		√	√
	100% Cooling at 43°C		√	√
	100% Inner Grooved Copper Tubes		√	√
	SuperSlit Fins		√	√
	Stabilizer Free Operation		√	√
	Filter Clean Indicator		√	√
	Penta Sensor		√	√
	SuperFine Mesh filter		√	√
Advance Features	On / Off Timer		√	√
	Hydrophilic Fins (Indoor Unit)		√	√
	One Touch Super Silent		√	√
	Heat mode		√	√
	Backlight Remote Controller		√	√
Assurance*	Compressor Warranty	1+9 Years	√	√
	Controller (PCB) Warranty	1 + 4 Years	√	√
	Warranty on Entire Machine	1 Year	√	√
Dimensions	Dimension (IDU) (W x H x D)	mm	997 x 294 x 253	968 x 294 x 240
	Dimension (ODU) (W x H x D)	mm	792 x 600 x 299	750 x 548 x 288
	Suction Line Diameter	mm / (Inches)	15.8 (5/8")	12.7 (1/2")
	Liquid Line Diameter	mm (Inches)	6.35 (1/4")	6.35 (1/4")
	Net Weight IDU /ODU	Kg	13.00 / 45.00	11.20 / 34.00

Notes:
Unit performance confirms to ISI1391-2.
Auto Mode, Cool Mode, Fan Mode, Dry Mode (better humidity control), LCD remote control, Auto Fan Speed, Auto Restart, Green Refrigerant, features are available in every model.
*At Super Silent fan speed & at a distance of 1m.
Permissible Maximum Pipe length limit is up to 25 Mtrs. Features may vary from model to model. Due to continuous research & development, specifications & features may change without prior notice.
#T&C apply. Offer available on select models only and subject to company's discretion. Offer can be withdrawn anytime without prior notice.

Tech Data Split AC - Fixed Speed Models

	Description	Unit	Senpai 3200FL		
Details	Model Number		RAS.B312PCAIBA	RAS.B318PCAIBA	RAS.B222PCAIBA
	Star Rating		3	3	2
	Compressor	Type / Refrigerant	Tropical Rotary / R32	Tropical Rotary / R32	Tropical Rotary / R32
Performance	Rated Cooling (100 % load)	BTU/Hr (Watts)	12000 (3517)	17500 (5130)	21665 (6350)
	Maximum Cooling	BTU/Hr (Watts)	N/A	N/A	N/A
	Rated ISEER		3.85	3.82	3.75
	Annual Power Consumption (As per BEE Norms) (kWh)		706.76	1039.62	1310.56
	Fan Speed	No. of steps	5	5	5
	Air Flow (IDU) (Cooling-Super High)	CFM	400	670	670
	Sound level *1	dBA	36	39	39
Electrical	Rated Power Supply	Volts / Hz / Phase	230/50/1	230/50/1	230/50/1
	Rated Power Input	Watts	913	1343	1693
	Rated Current Drawn	Amps	4.18	6.15	7.74
Key Features	Silent air (Wave Blade Design)		√	√	√
	Odour-free air (Soft Dry)		√	√	√
	Long air throw *2		√	√	√
	Ambience Light		√	√	√
	Tropical Design works up to 52°C		√	√	√
	My Mode		√	√	√
	100% Inner Grooved Copper Tubes		√	√	√
	SuperSlit Fins		√	√	√
	Filter clean indicator		√	√	√
	SuperFine Mesh Filter		√	√	√
Advance Features	On / Off Timer		√	√	√
	Good Sleep Mode		√	√	√
	ECO Mode		√	√	√
	Powerful Mode		√	√	√
	One Touch Super Silent		√	√	√
	Up/Down Swing		√	√	√
	Hydrophilic Fins (Indoor Unit)		√	√	√
	Backlight Remote controller		√	√	√
Assurance*	Compressor Warranty	1 + 4 Years	√	√	√
	Controller (PCB) Warranty	1 + 4 Years			
	Warranty on Entire Machine	1 Year	√	√	√
Dimensions	Dimension (IDU) (W x H x D)	mm	780 x 280 x 222	1050 x 294 x 250	1050 x 294 x 250
	Dimension (ODU) (W x H x D)	mm	658 x 530 x 274	750 x 550 x 290	800 x 640 x 298
	Suction Line Diameter	mm (Inches)	9.52(3/8")	12.7(1/2")	15.8(5/8")
	Liquid Line Diameter	mm (Inches)	6.35(1/4")	6.35(1/4")	6.35(1/4")
	Net Weight IDU /ODU	Kg	8.5/29.0	11.4/36.5	11.4/41.0

Notes:
Unit performance confirms to ISI1391-2.
Auto Mode, Cool Mode, Fan Mode, Dry Mode (better humidity control), LCD Remote Control, Auto Fan Speed, Auto Restart, Green Refrigerant, features are available in every model.
*1 At Super Silent fan speed & at a distance of 1 m.
*2 Air flow range for long air throw will vary as per chassis/tonnage, 24 mtr. in 1050 mm, 18 mtr. in 950 mm & 12 mtr. in 780 mm in fan mode.
Permissible maximum pipe length limit is up to 25 mtrs
Features may vary from model to model. Due to continuous research & development, specifications & features may change without prior notice.
#T&C apply. Offer available on select models only and subject to company's discretion. Offer can be withdrawn anytime without prior notice.



Tech Data - Window AC Models

	Description	Unit	Shizuka Inverter Series	Kaze Plus Fixed Speed Series	
Details	Model Number		RAW518HGE0Z1	RAW312HEDO	RAW318HHDO
	Star Rating		5	2	3
	Compressor	Type	Twin Rotary/R32	Rotary/R32	Rotary/R32
Performance	Rated Power Supply	Volts/Hz/Phase	230/50/1	230/50/1	230/50/1
	Rated Cooling (100 % load)	BTU /Hr (Watts)	16720 (4900)	11260 (3300)	16037 (4700)
	Maximum Cooling	BTU /Hr (Watts)	18596 (5450)	-	-
	ISEER		3.55	3.00	3.15
	Annual Power Consumption (As per BEE Norms)	Kwh	1068.21	851.52	1153.42
	Fan Speed	Steps	3	3	3
	Sound Level*	dBA	50	46	50
	Air Flow (Super High) - Cooling / Heating	CFM	450	295	450
Electrical	Rated Power Input - Cooling/Heating	Watts	1585	1100	1490
	Current Drawn - Cooling / Heating	Amps	7.25	4.90	6.82
Key Features	Xpandable Inverter		√	-	-
	Filter Clean Indicator		√	√	√
	On/Off Timer with Advance Start Up		√	√**	√**
	Remote	Type	wireless	wireless	wireless
	Wireless LCD Remote with Backlight		√	√	√
Advance Features	Defrosting Sensor		√	-	-
	Auto Restart		√	√	√
	Auto Fan Speed		√	-	-
	Precoated Alluminum Fins		√	√	√
Assurance*	Compressor Warranty	1 + 9 Years	√		
	Compressor Warranty	1 + 4 Years		√	√
	Controller (PCB) Warranty	1 + 4 Years	√		
	Warranty on Entire Machine	1 Year	√	√	√
Dimensions	Dimension (W x H x D)	mm	660 x 430 x 755	560 x 377 x 615	660 x 430 x 755
	Net Weight	Kg	52.5	40.0	52.0

Notes:
Unit performance conforms to IS1391-1.
Features may vary from model to model.
1.*At Silent fan speed & at a distance of 1 m.
2. **It indicates that model has on/off timer without advanced startup.
3. a.Inverter WAC are designed to work up to in ambient temperature up to 52°C.
 b.Non Inverter WAC designed to work up to 50°C for 1.5 TR.
 c.Non Inverter WAC designed to work up to 48°C for 1.0 TR.
4.Due to continuous research & development, specifications, features and look may change without prior notice.
#T&C apply. Offer available on select models only and subject to company's discretion. Offer can be withdrawn anytime without prior notice.

Service that exceeds your expectations

Our strengths

Striving for excellence at every step of your journey, we constantly endeavour to ensure that your requests are always met. Complemented by superior quality, service facilities, and well-trained technicians to provide support, we deliver perfection and expertise whenever and wherever needed to each and everyone of our 5 million customers.



Convenience at your doorstep with easy call registration facilities for 24x7 customer support

Dial-a-Care
079-7141-4848 (Landline)

WhatsApp
Registration No. 7567884848

Web Registration Facility
<https://www.hitachiaircon.com/in/contact-us>

Mobile App
Hitachi India Customer Care (For Android and iOS)

Request a Call Back
Submit your details and our Customer Care representative will call you back

Connect to management


Customers can reach out directly to our top management for any sort of issue with their service requests by utilising our simple escalation matrix that ensures faster resolution.

Extended warranty and Annual Maintenance Contract (AMC) packs

Hitachi Cooling & Heating gives an option to its customers to choose between extended warranty and AMC packs.



A complete care pack can be purchased by the customers at the time of purchase or installation of the new product from dealers or service providers within the specified period of product's purchase.



Our customers can choose from three types of AMC packs:

- Ordinary AMC pack
- Semi-comprehensive AMC pack
- Comprehensive AMC pack

Ryoku

Genuine is Powerful: Authentic Spare Parts and Accessories

Ryoku in Japanese means 'power'. Johnson Controls–Hitachi Cooling & Heating Air Conditioning India Limited offers genuine parts and accessories for air conditioners and refrigerators under its brand name, 'Ryoku'. The usage of genuine spares ensure the efficient working of the product. The spares and accessories are as per Hitachi Cooling & Heating Standards. Ryoku products include:

- Voltage Stabilizers
- Wall Brackets (L Type)
- Ryoku Indoor Units
- Compressors
- Koritsu Outdoor Unit
- Remote Controllers
- Air Filters



new air

